


FIG. 1

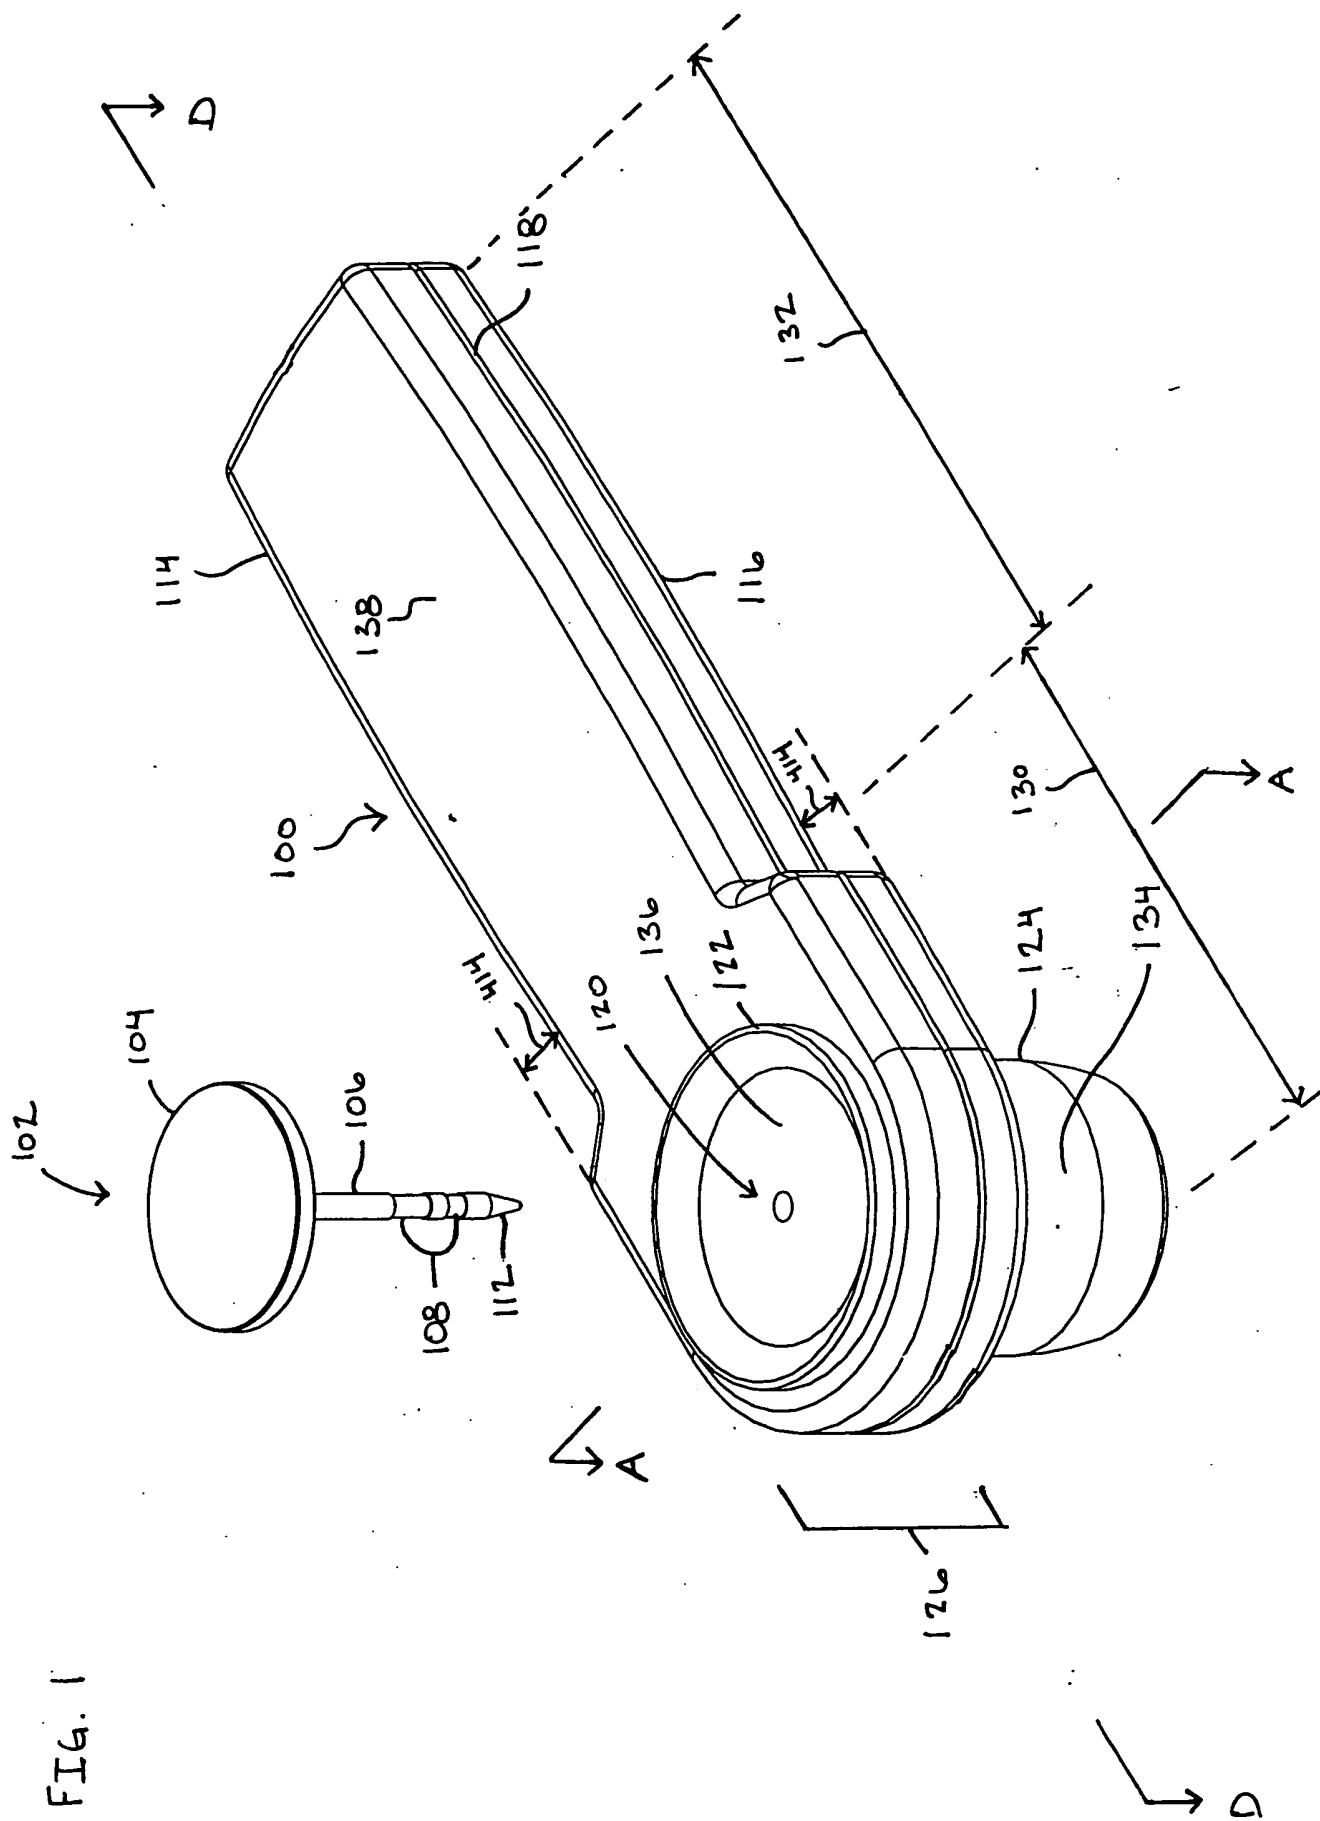

2/36

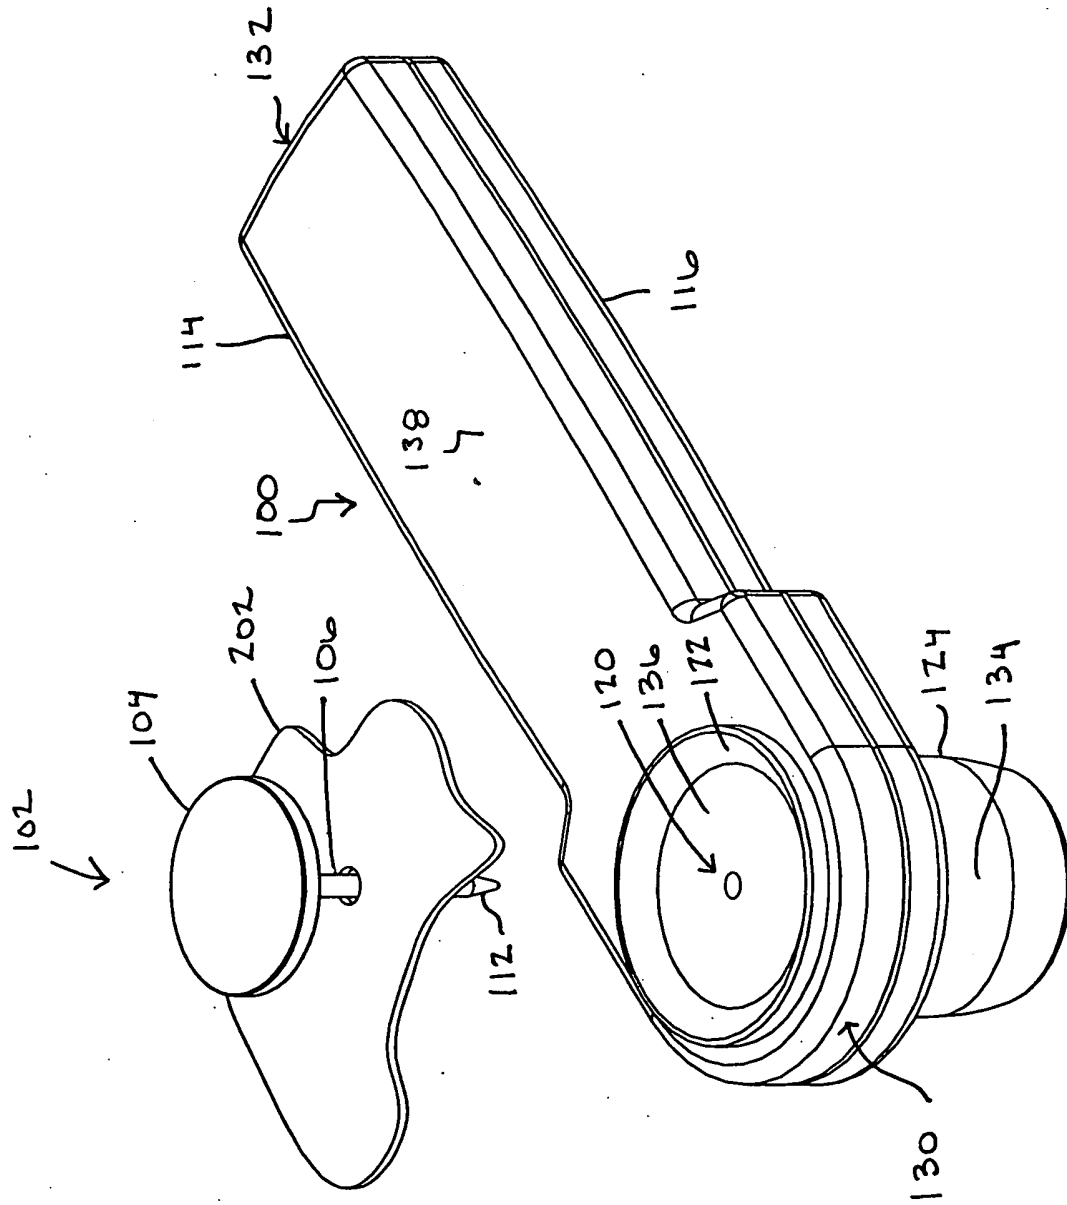


FIG. 2

3/36

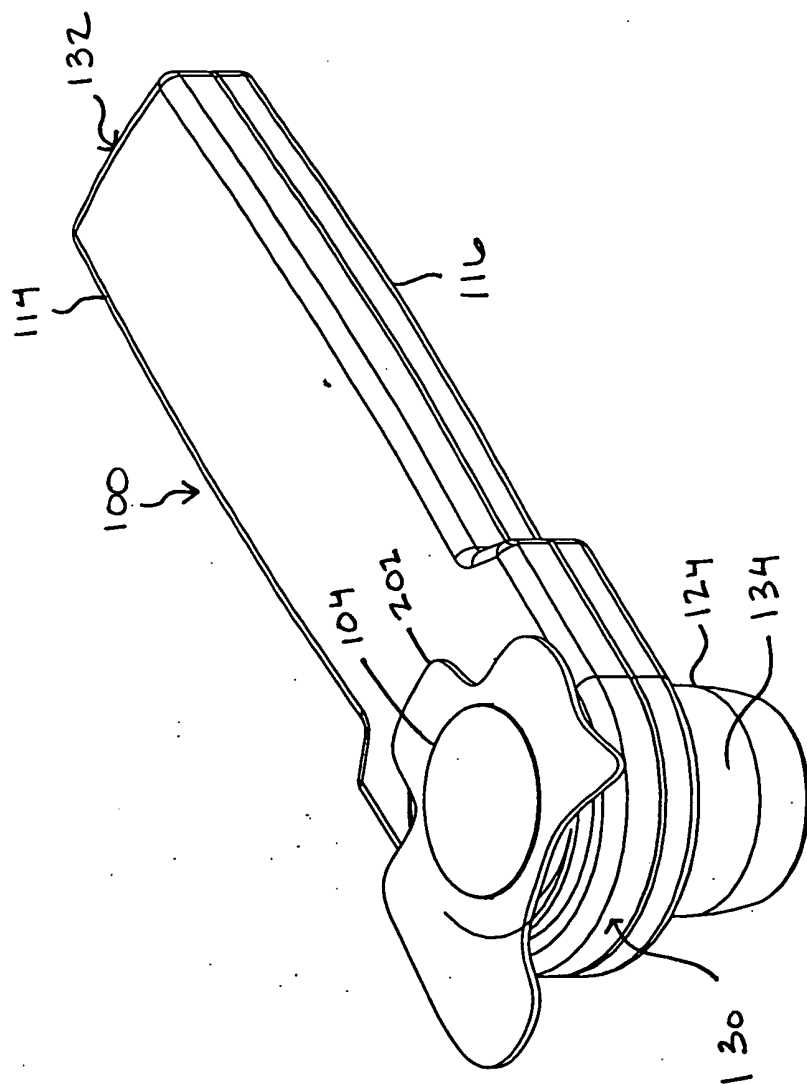


FIG. 3

4/320

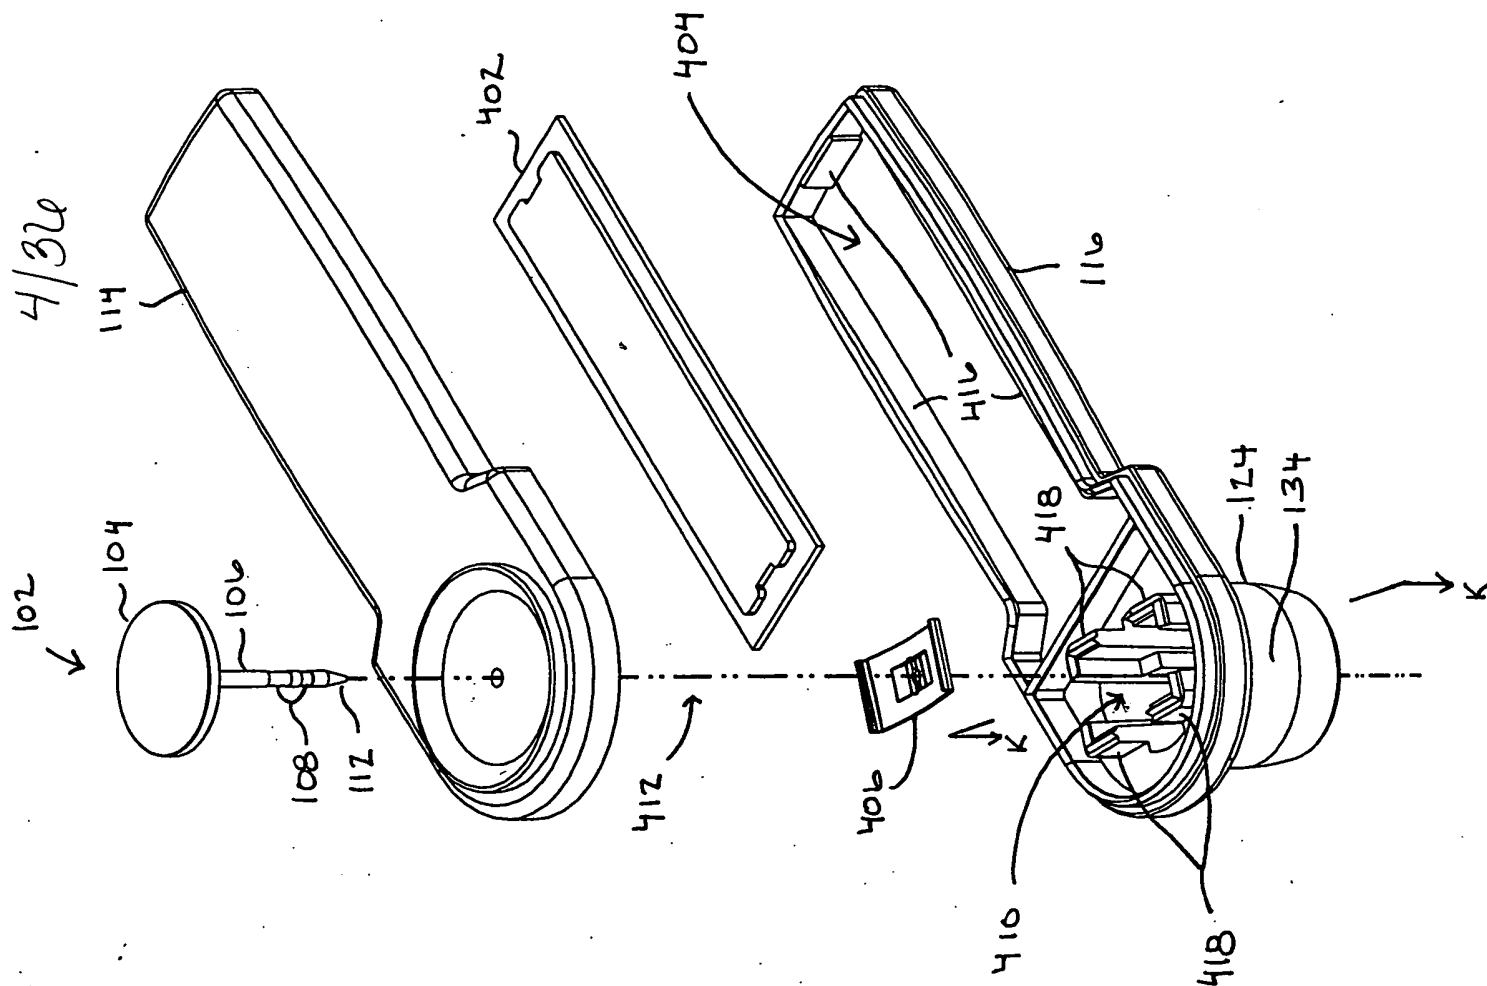


Fig. 4.

5/36

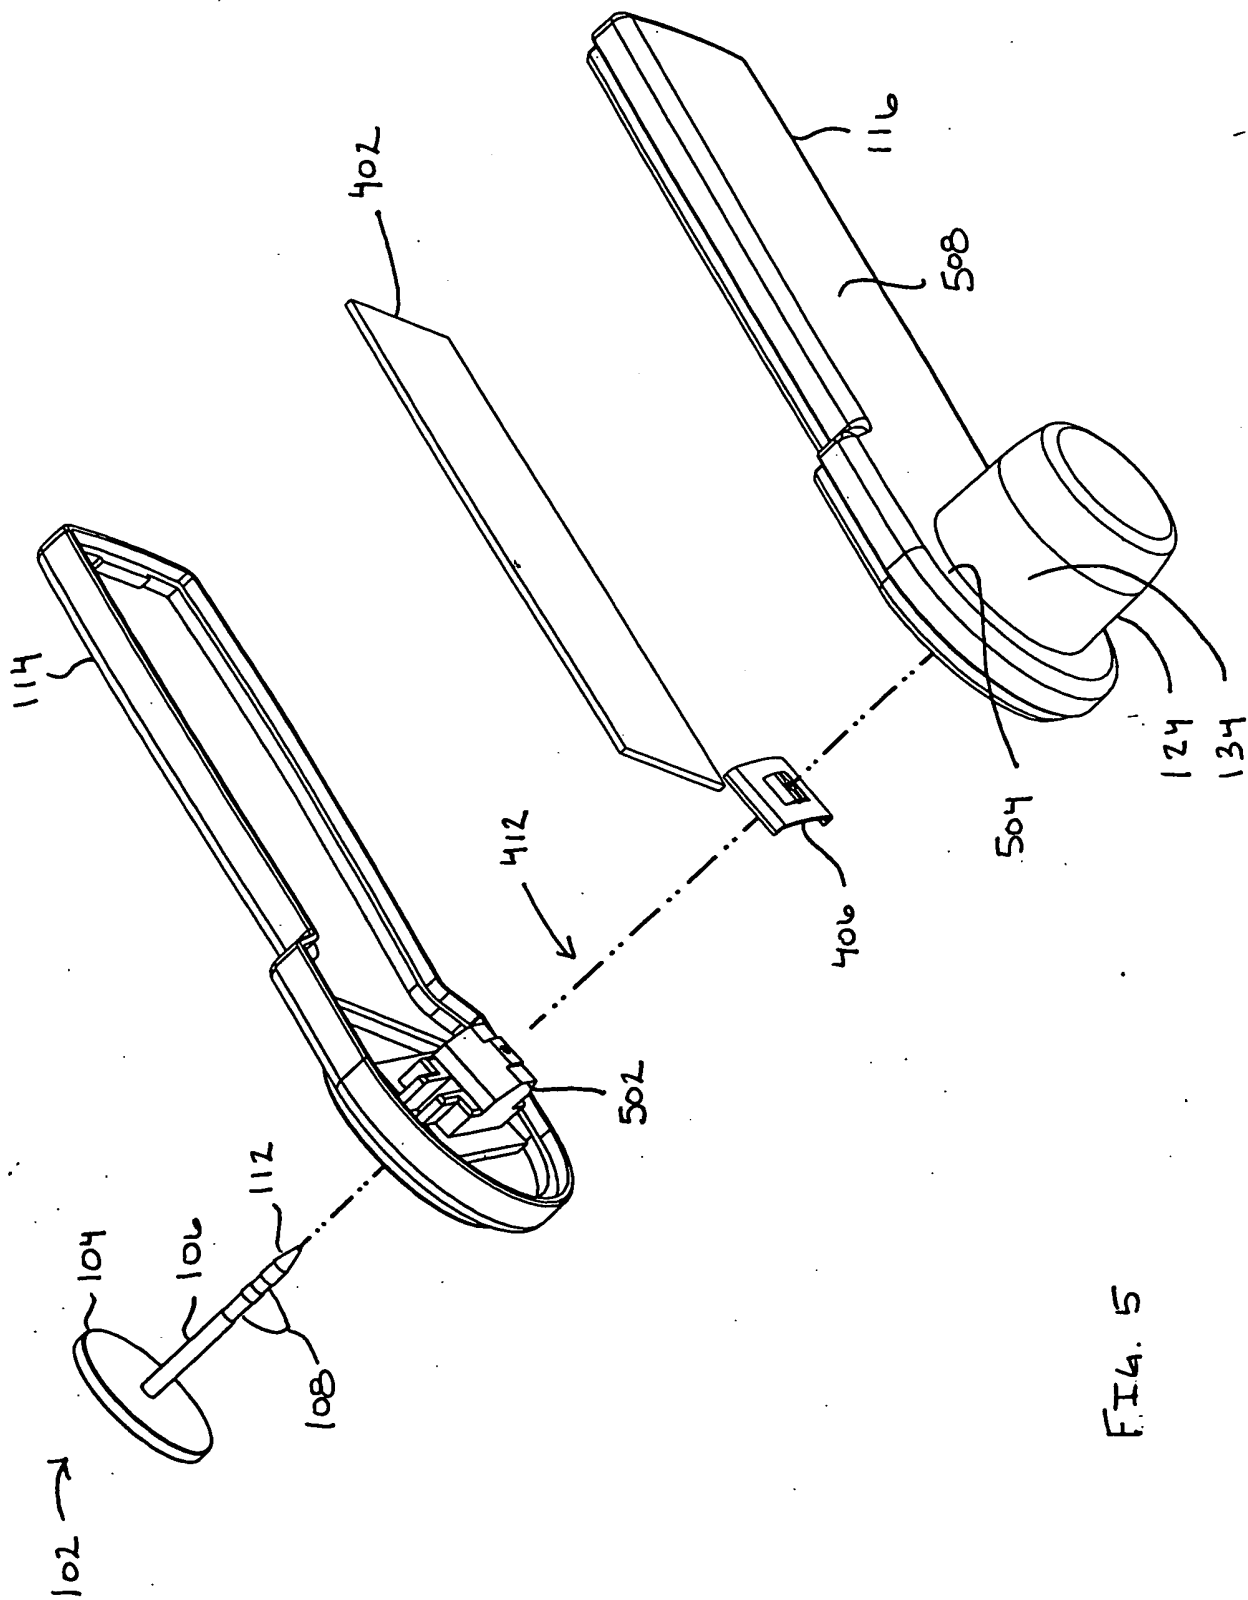


FIG. 5

6/36

602

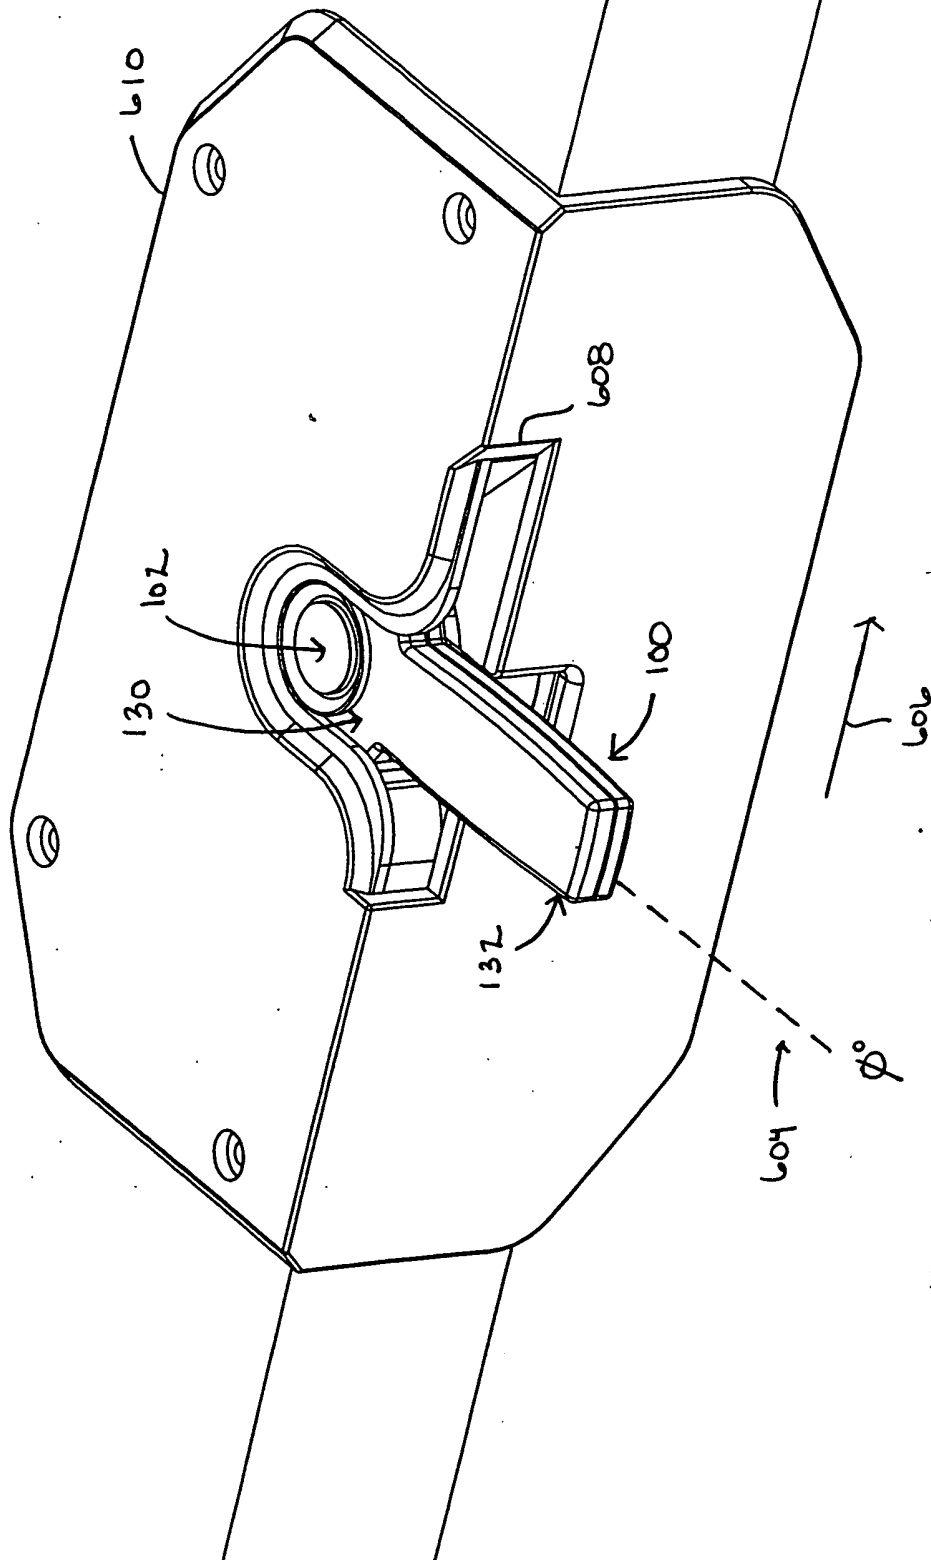


FIG. 6

7/36

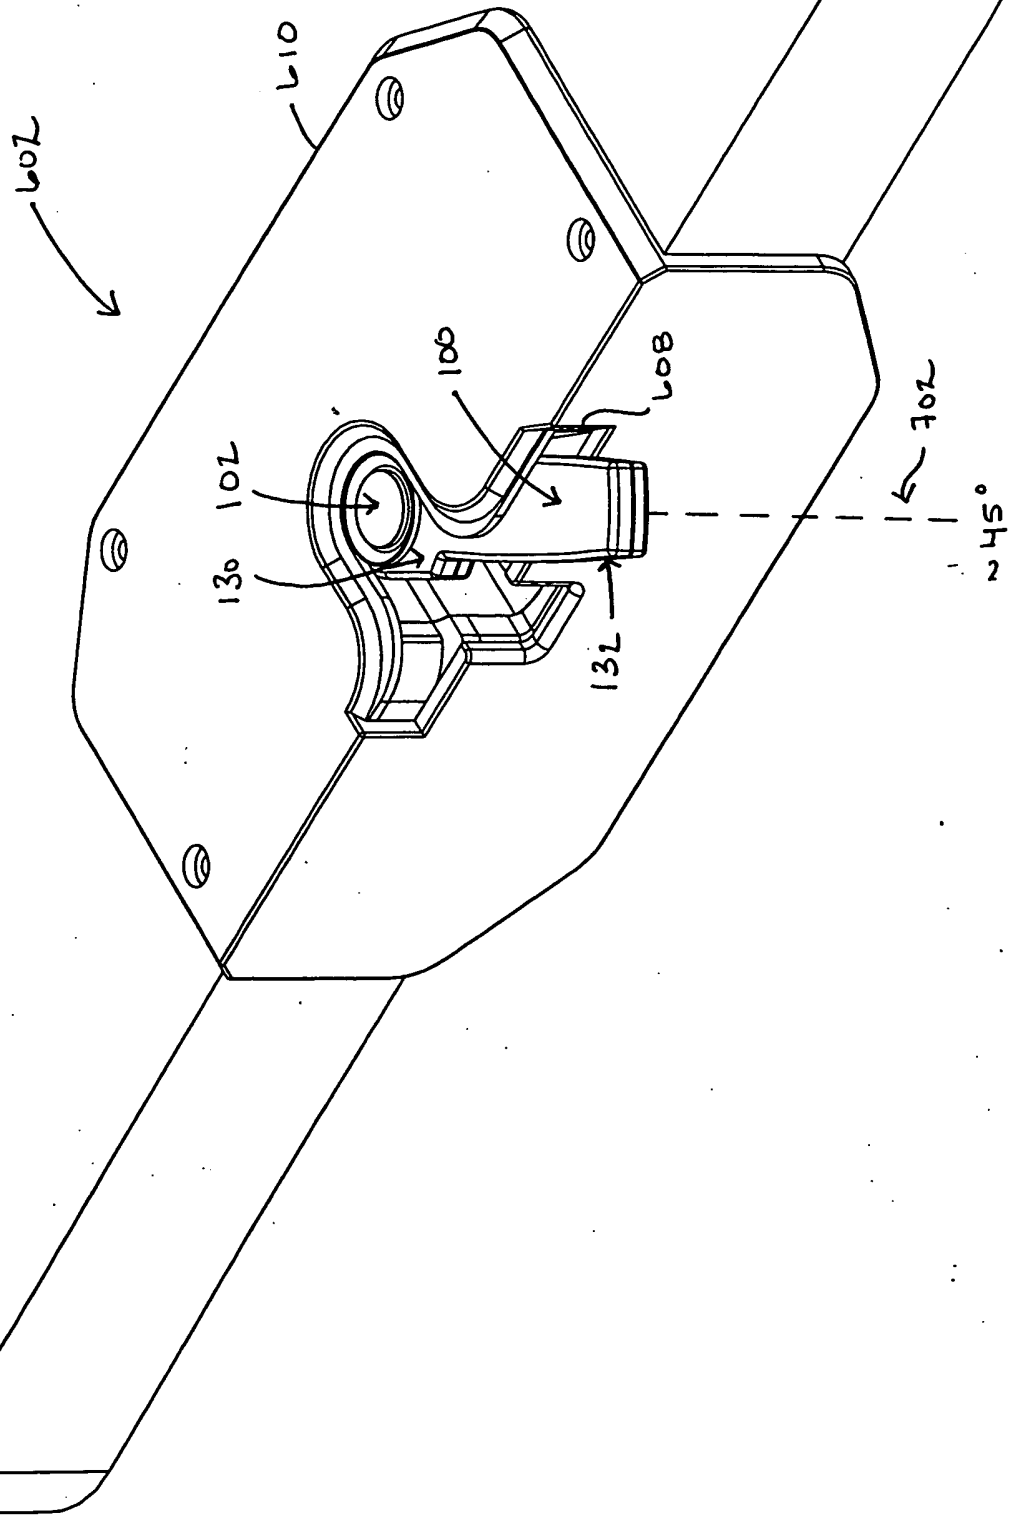


FIG. 7

8/36

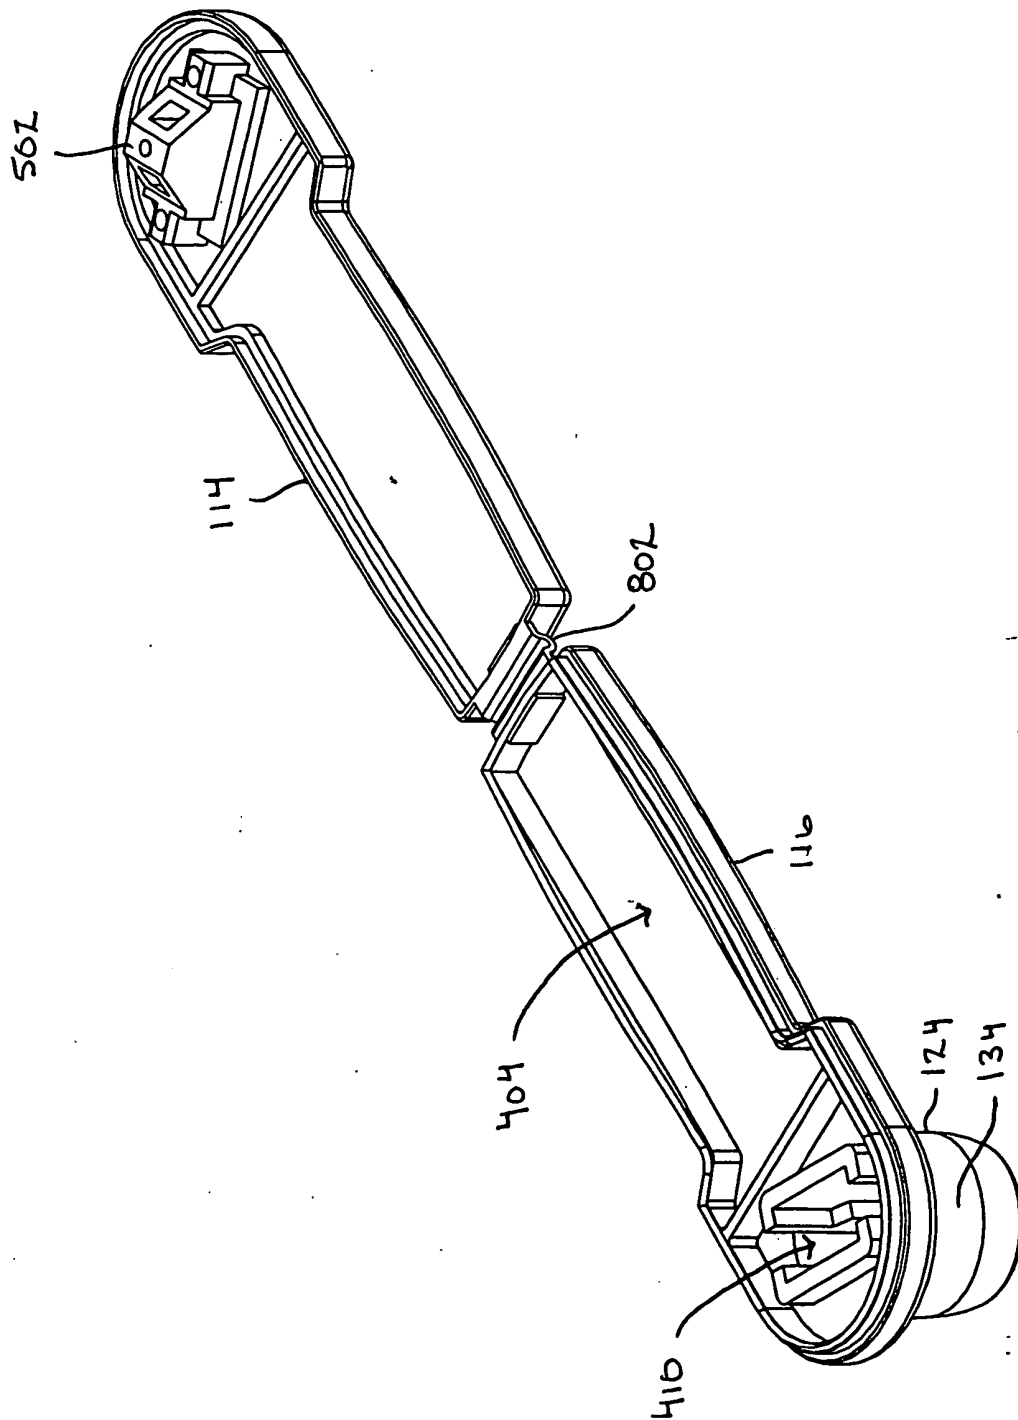


FIG. 8



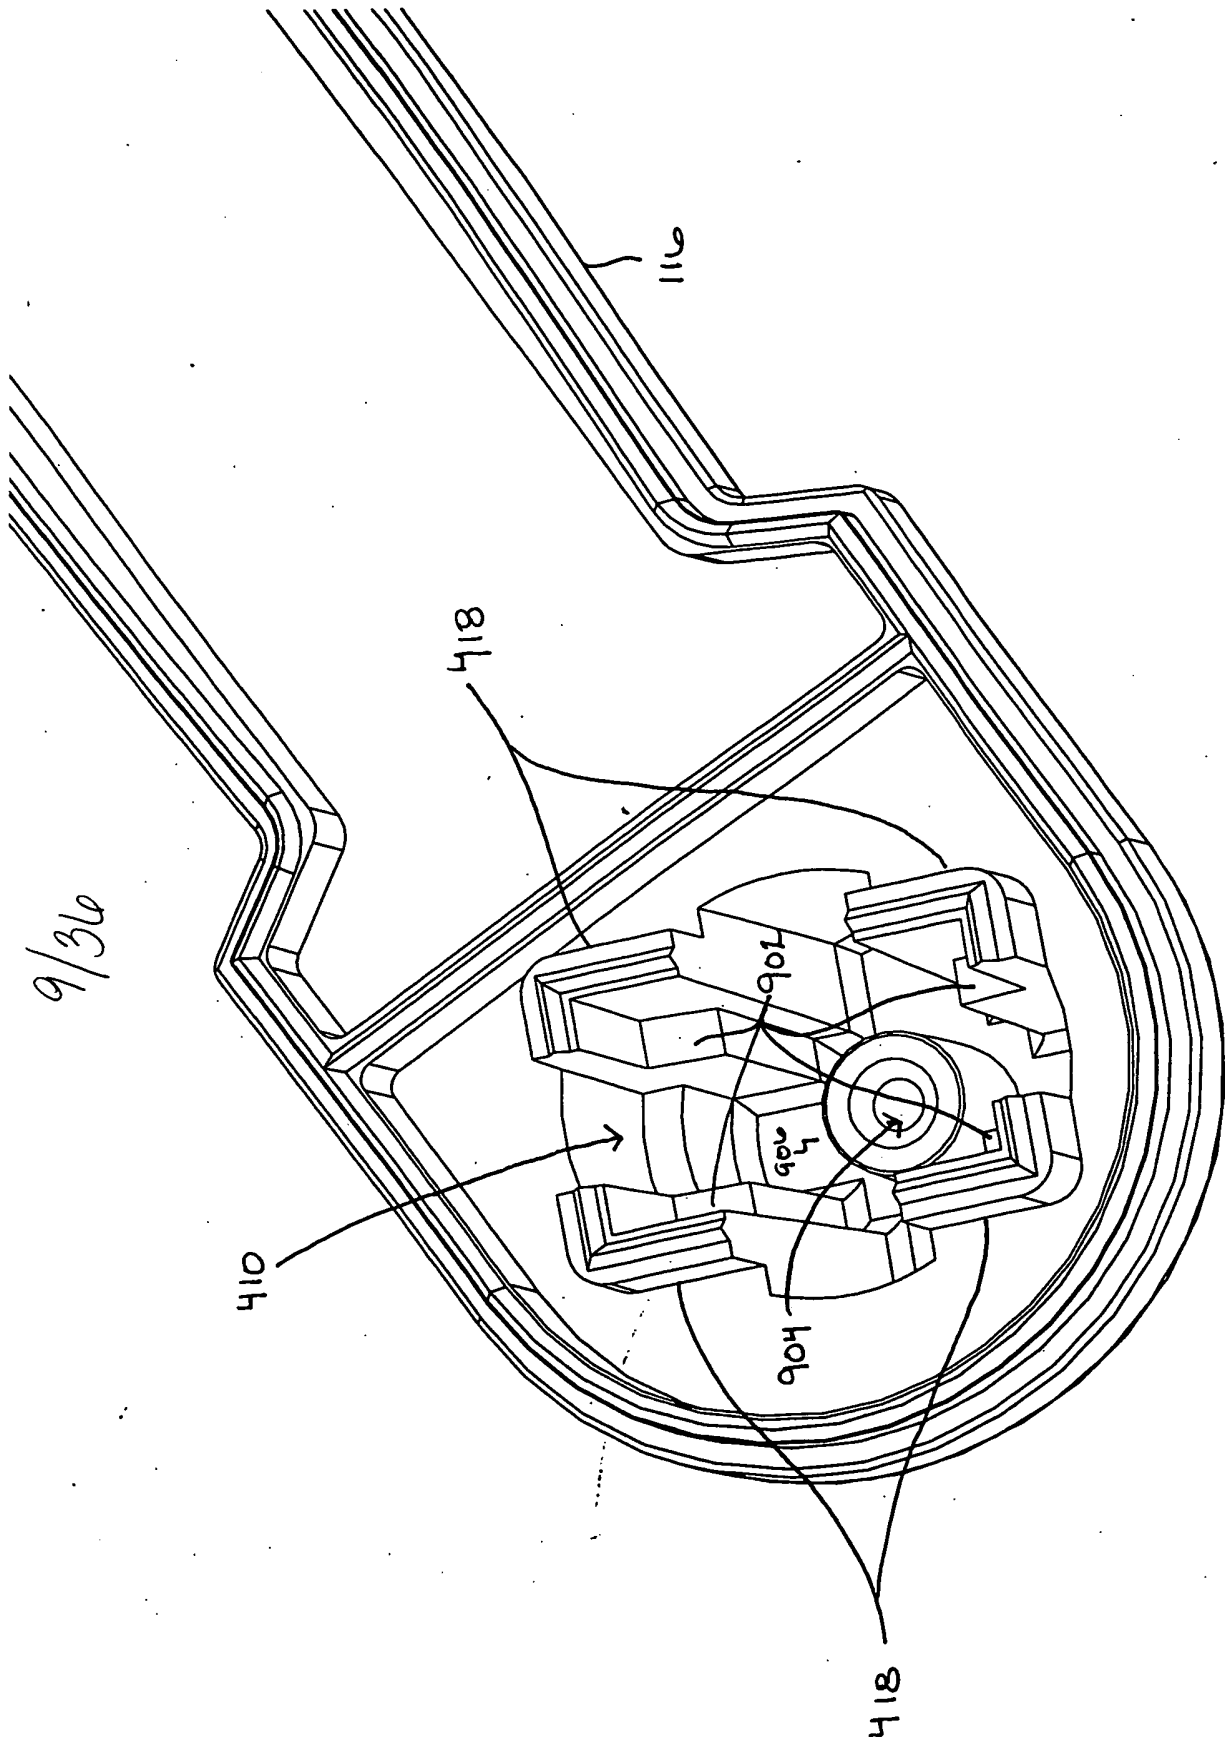


FIG. 9

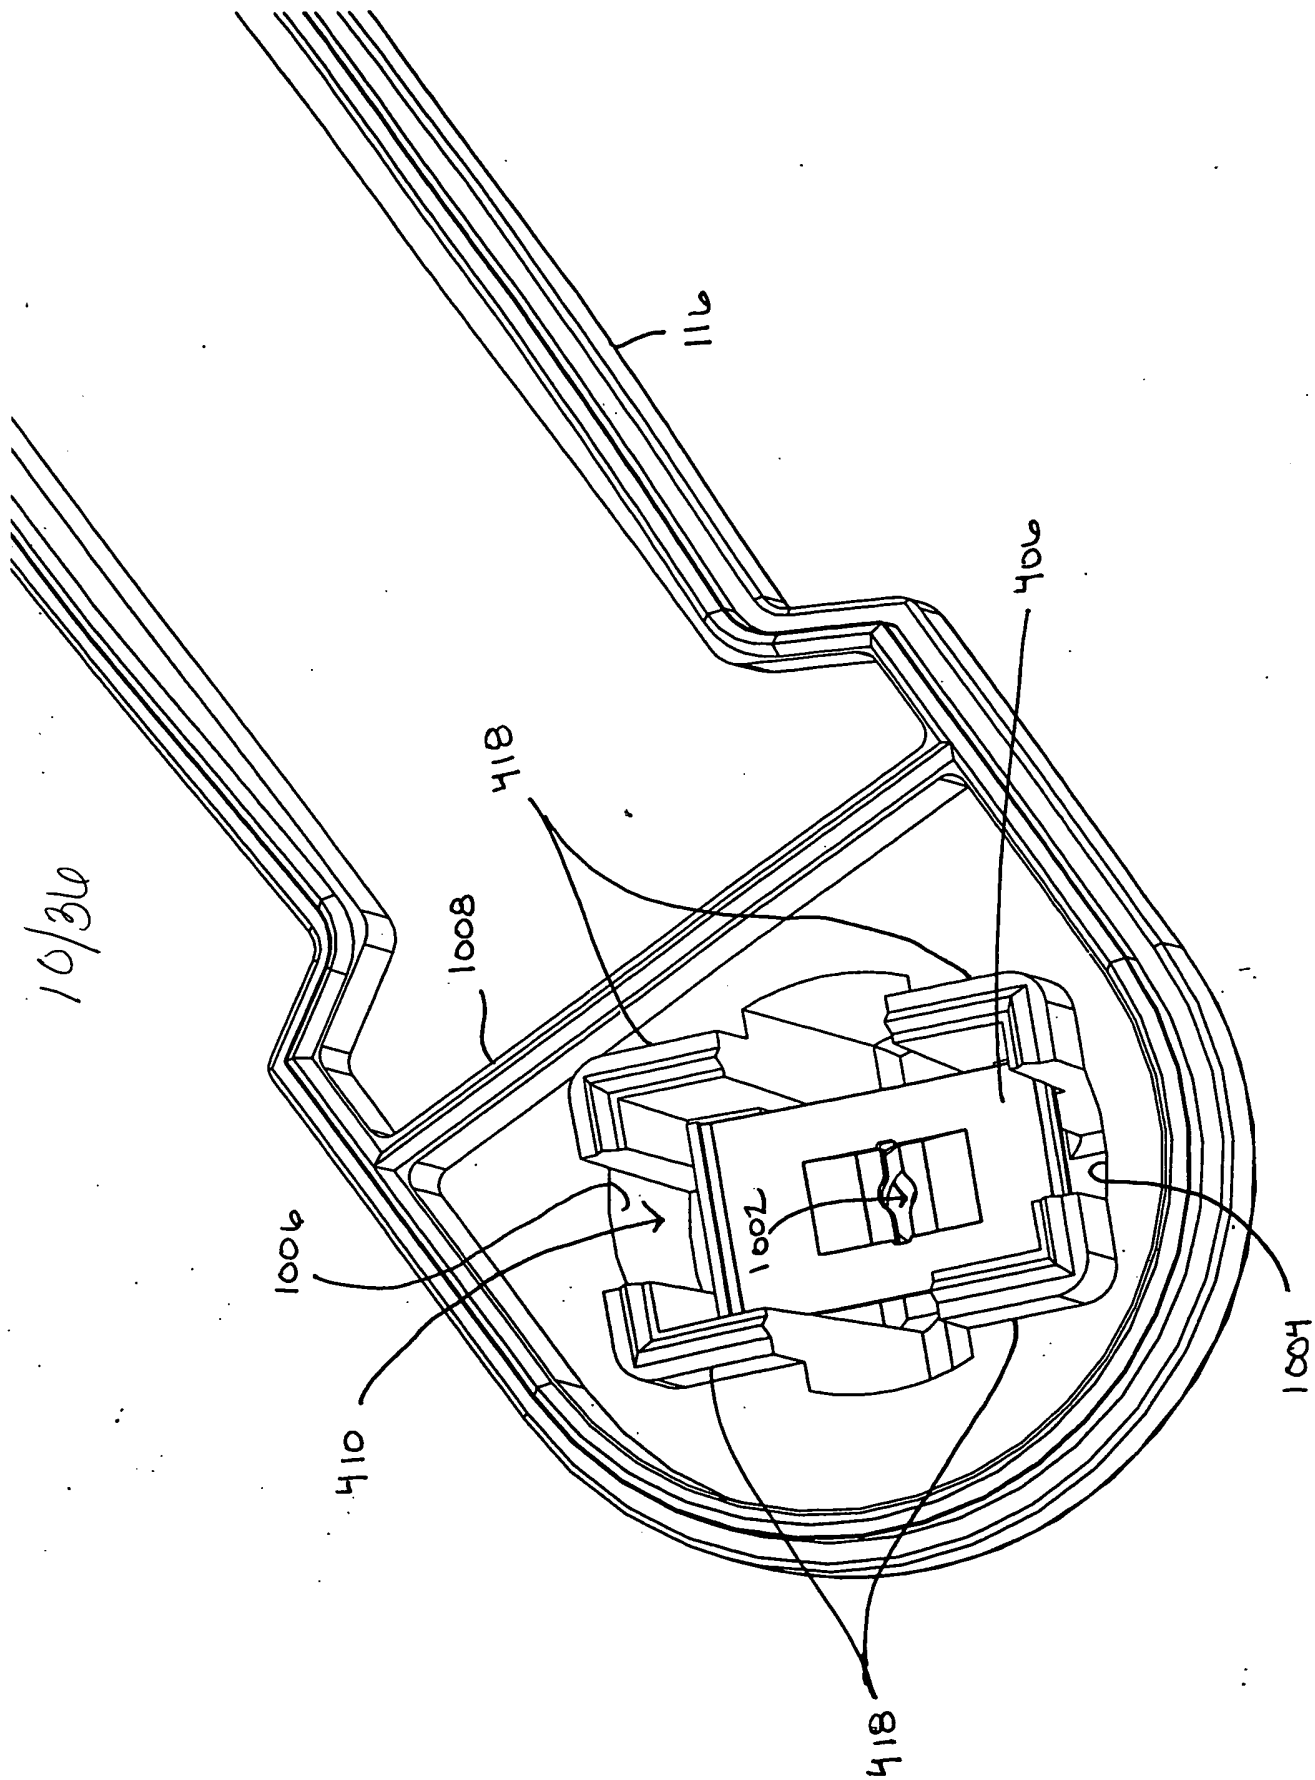


FIG. 10

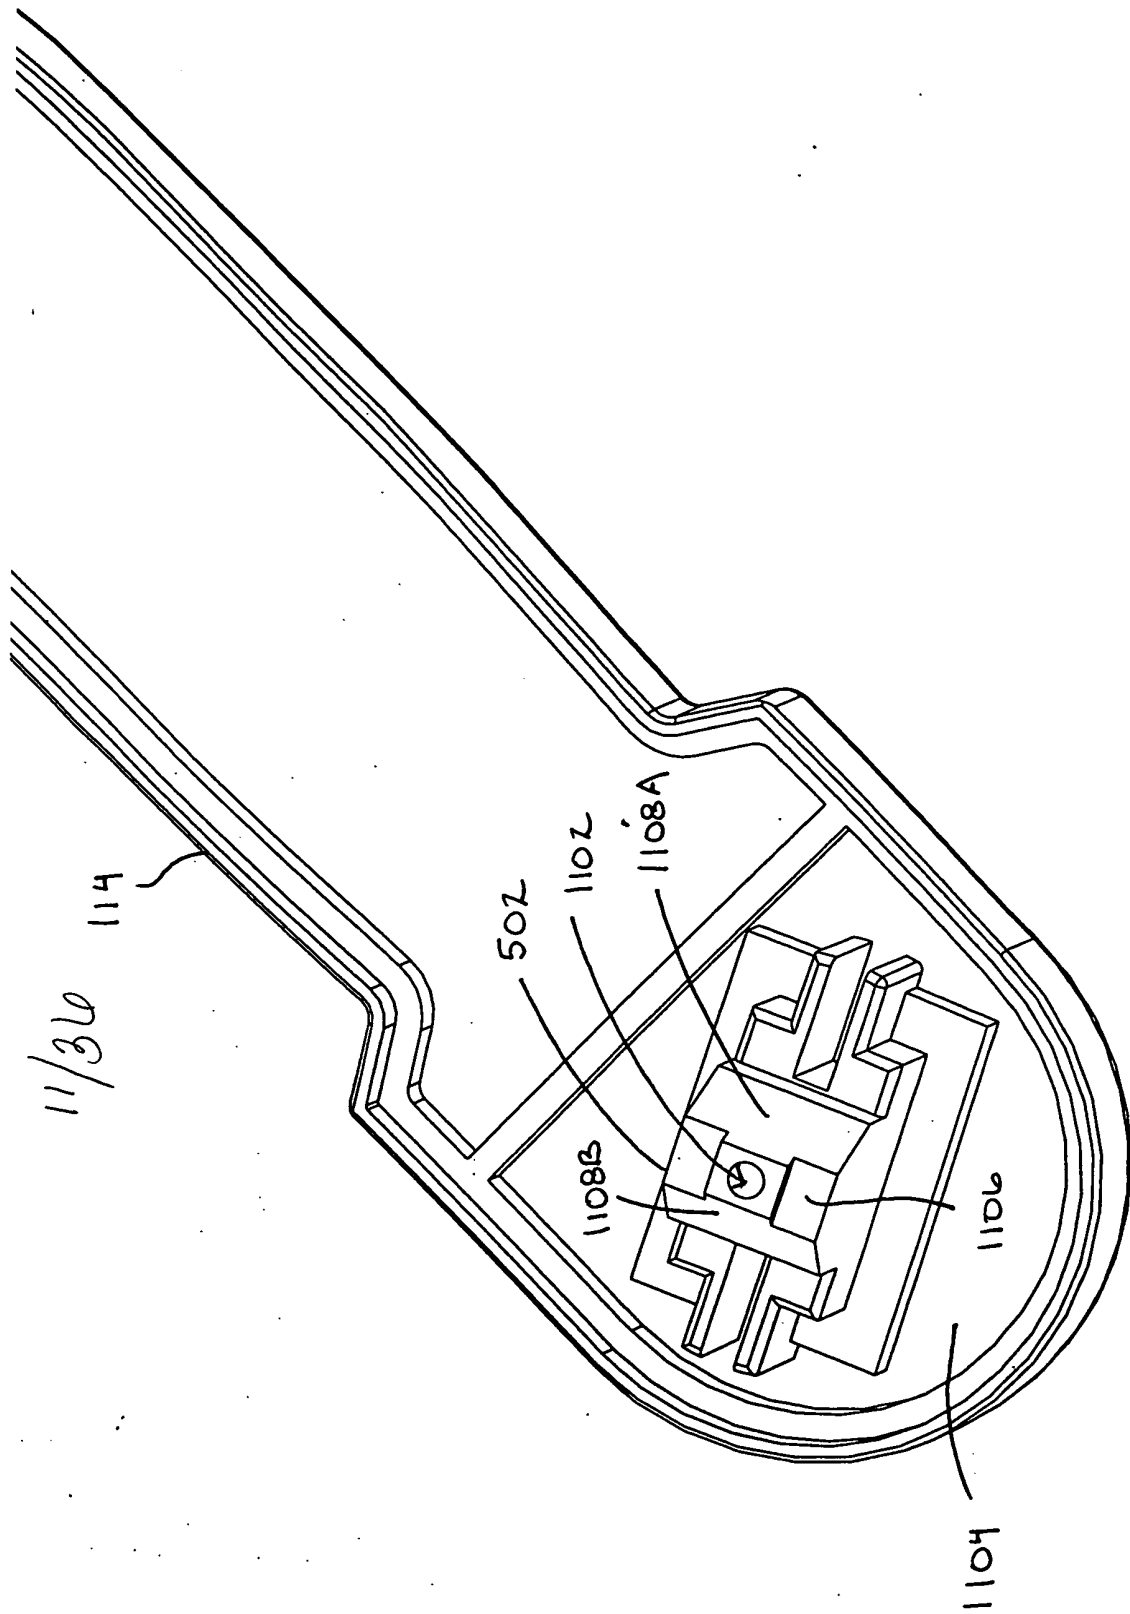


FIG. 11

1200

12/36

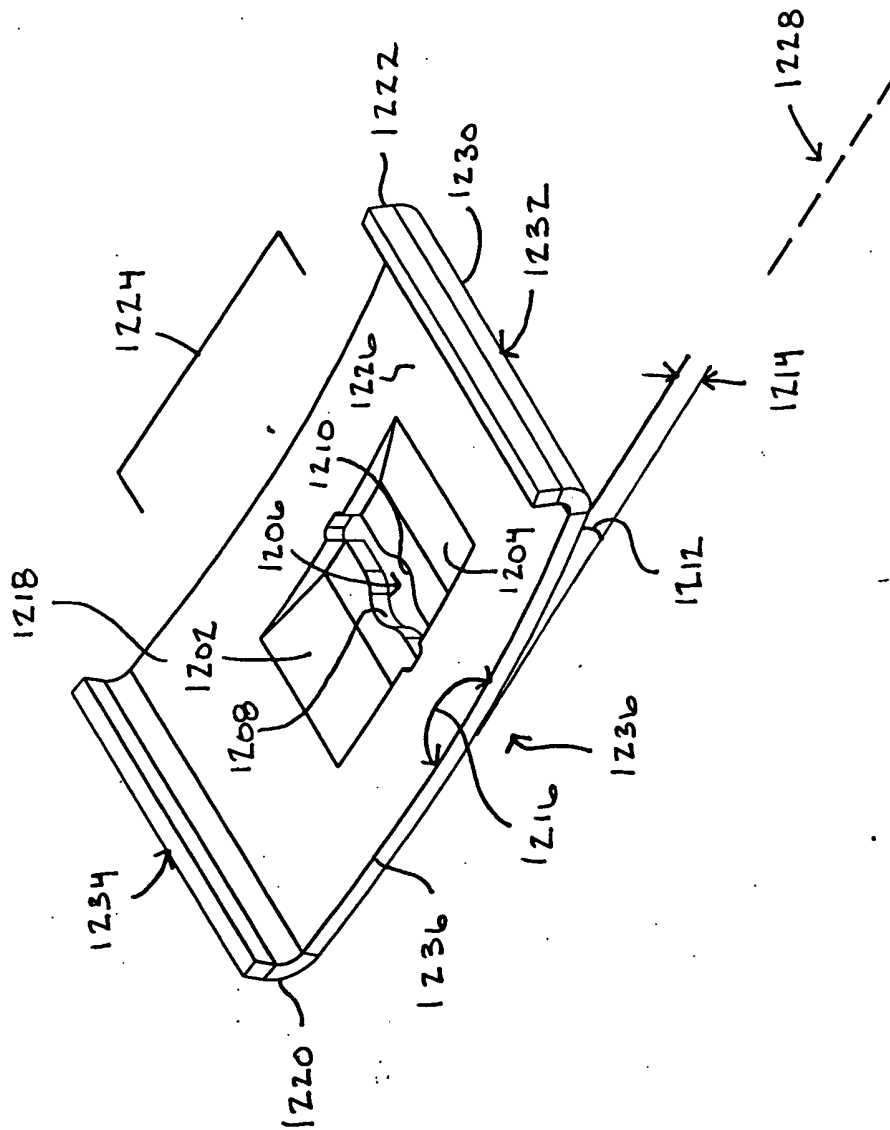


FIG. 12

13/36

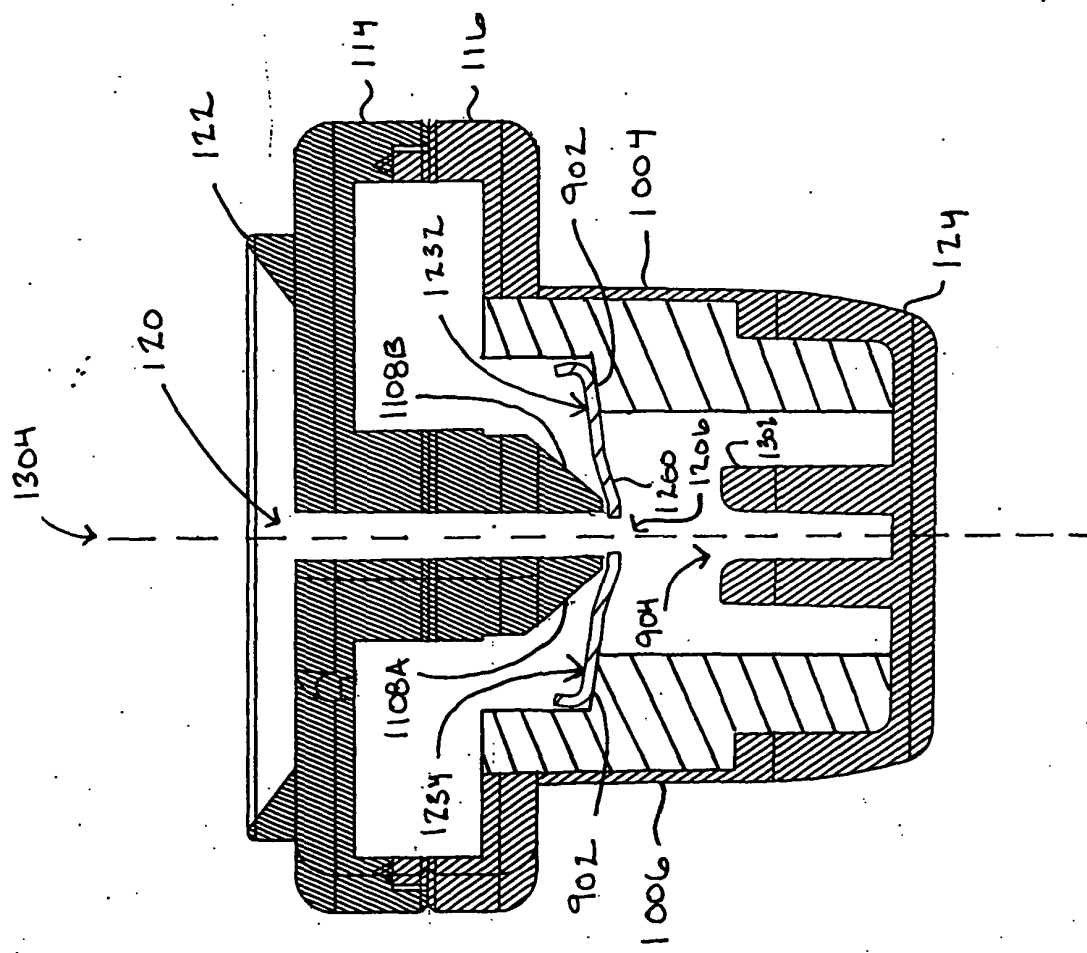


FIG. 13

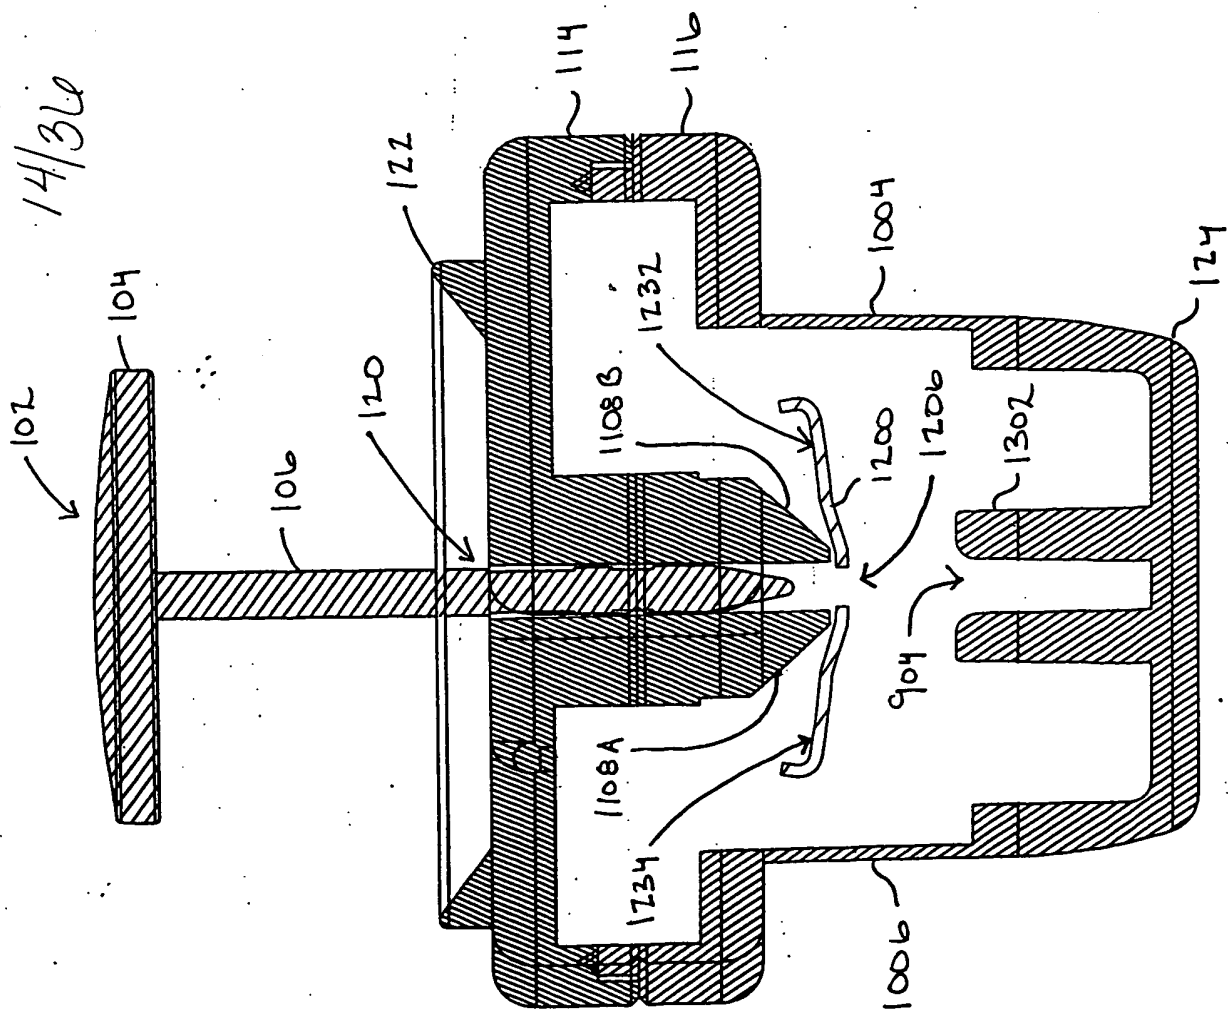


FIG. 14

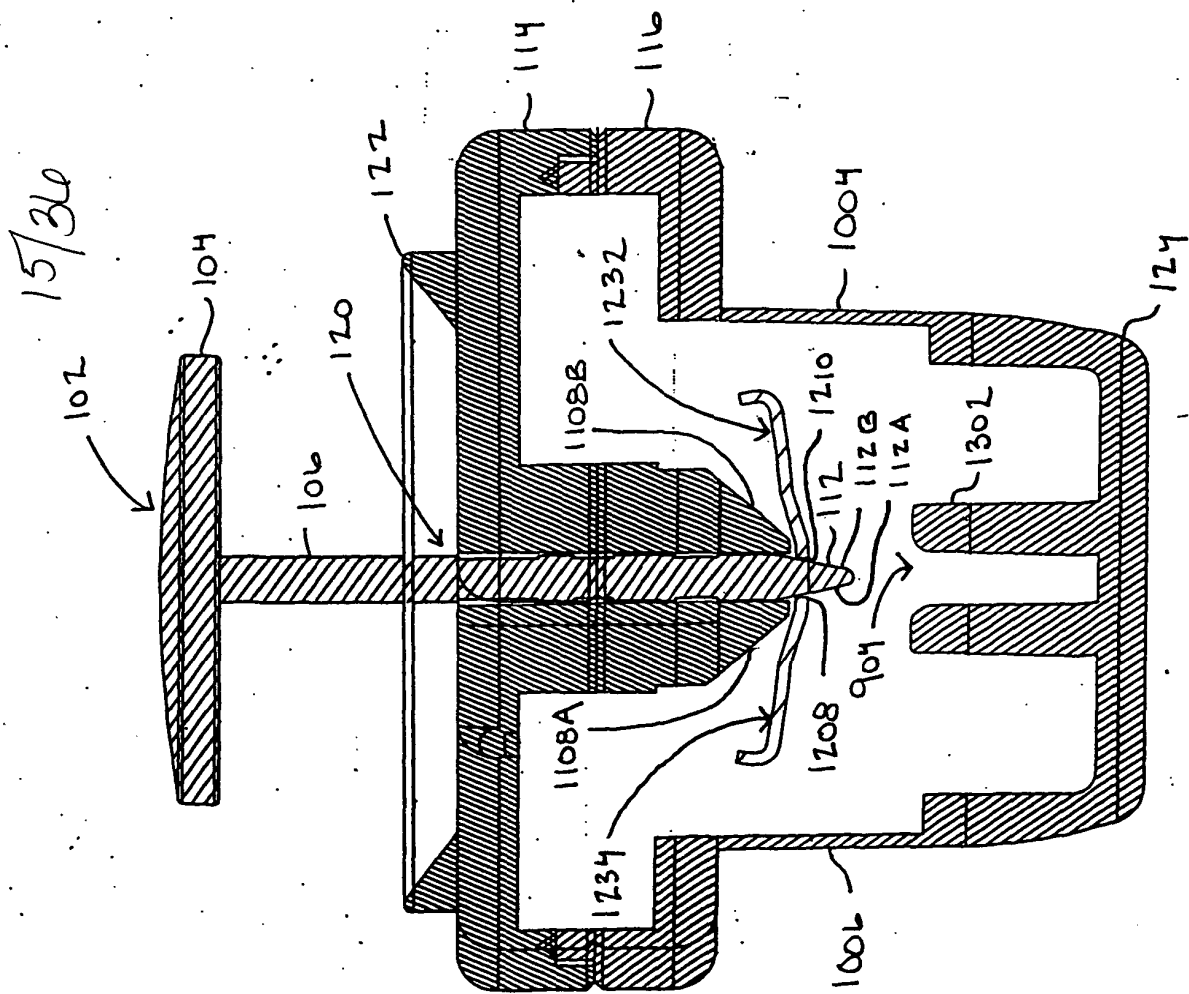


FIG. 15

Fig. 16



17/36

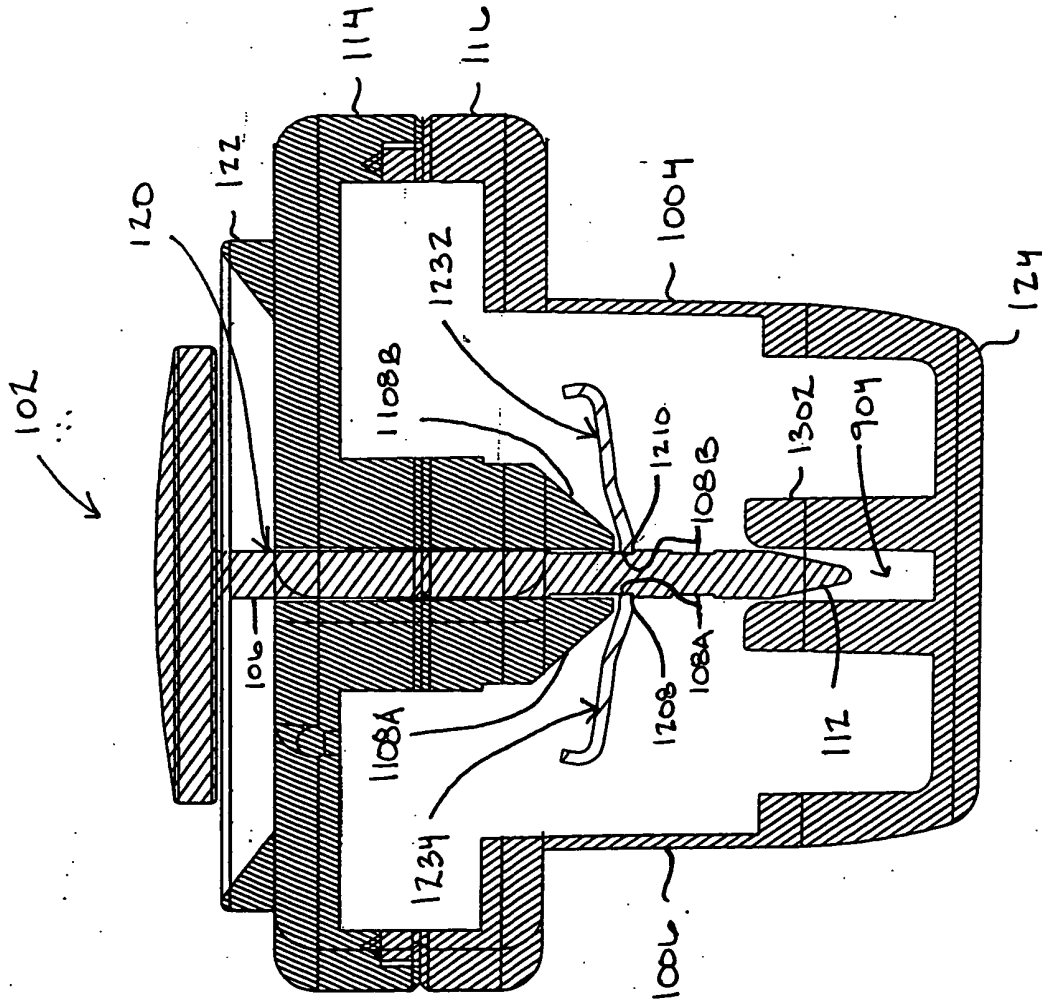


FIG. 17

18/36

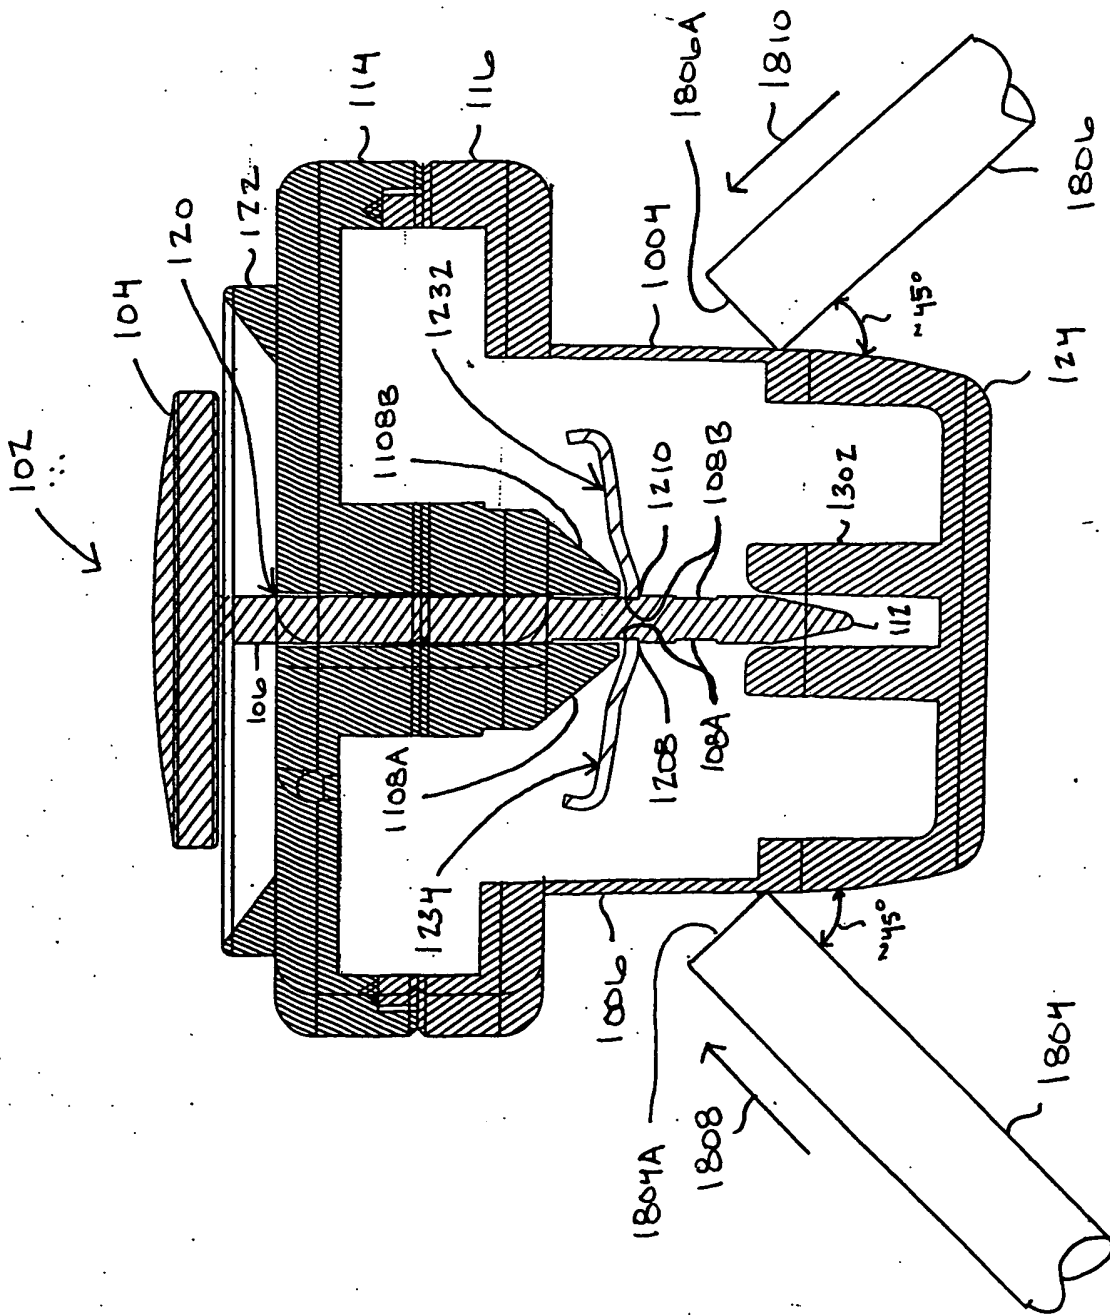


FIG. 18

Fig. 19

20/30

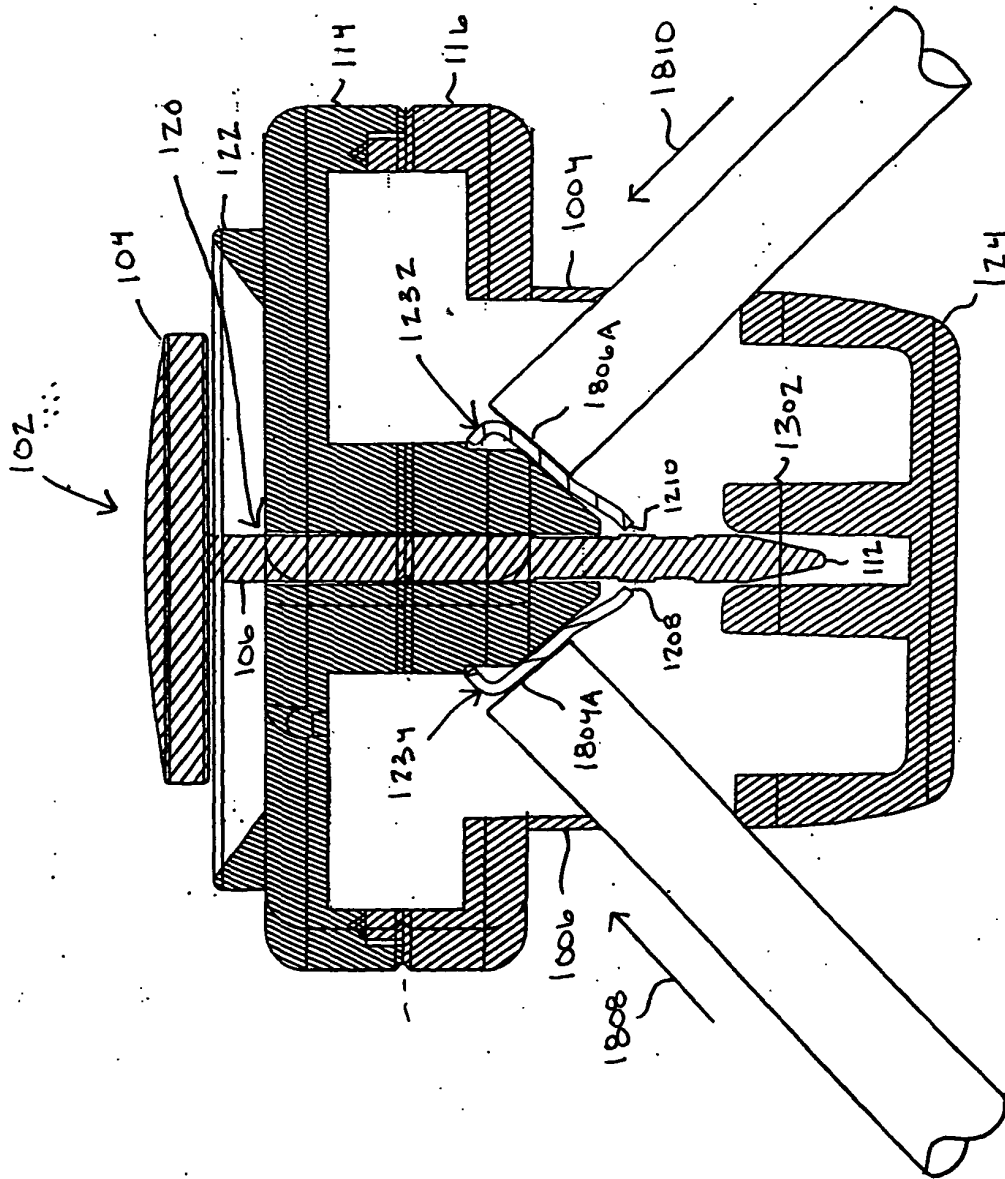


FIG. 20

FIG. 10 is a cross-sectional view of a device assembly. It features a central core 106 surrounded by a shell 108A and 108B. The shell has openings 110A and 110B. A top flange 104 is shown. Arrows indicate flow paths through the shell and around the core.

Fig. 21

22/36

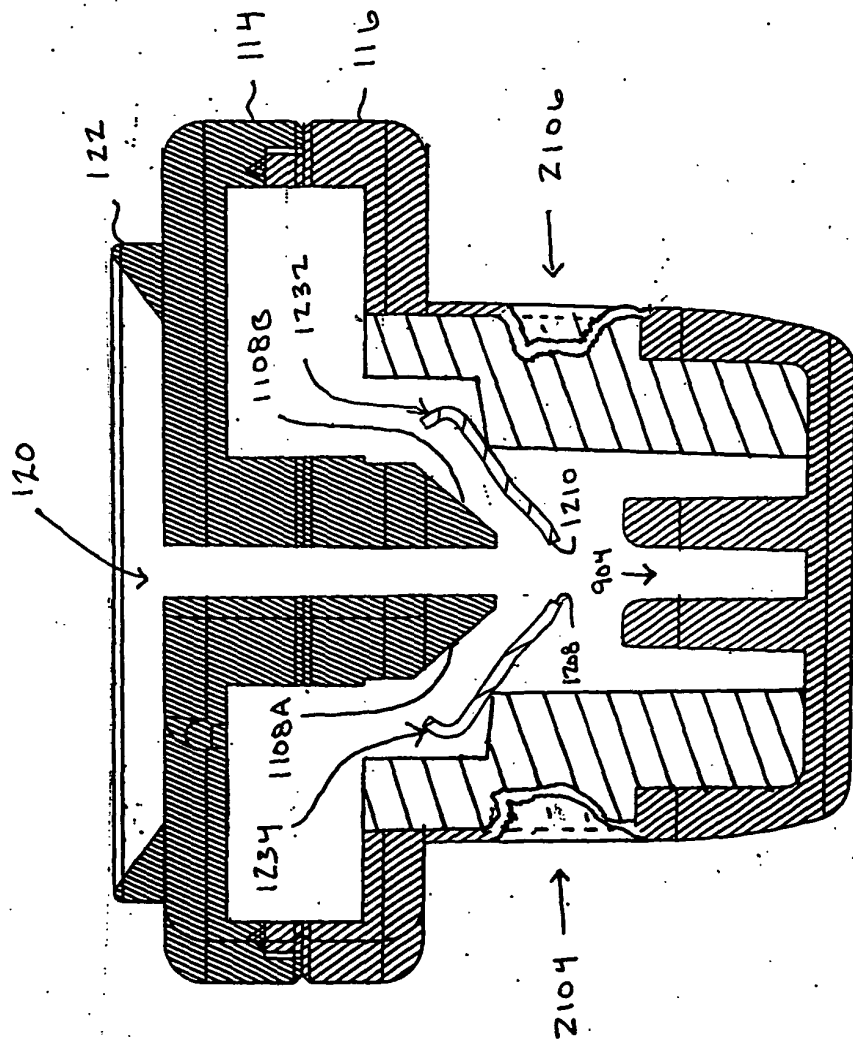


FIG. 22

23/30

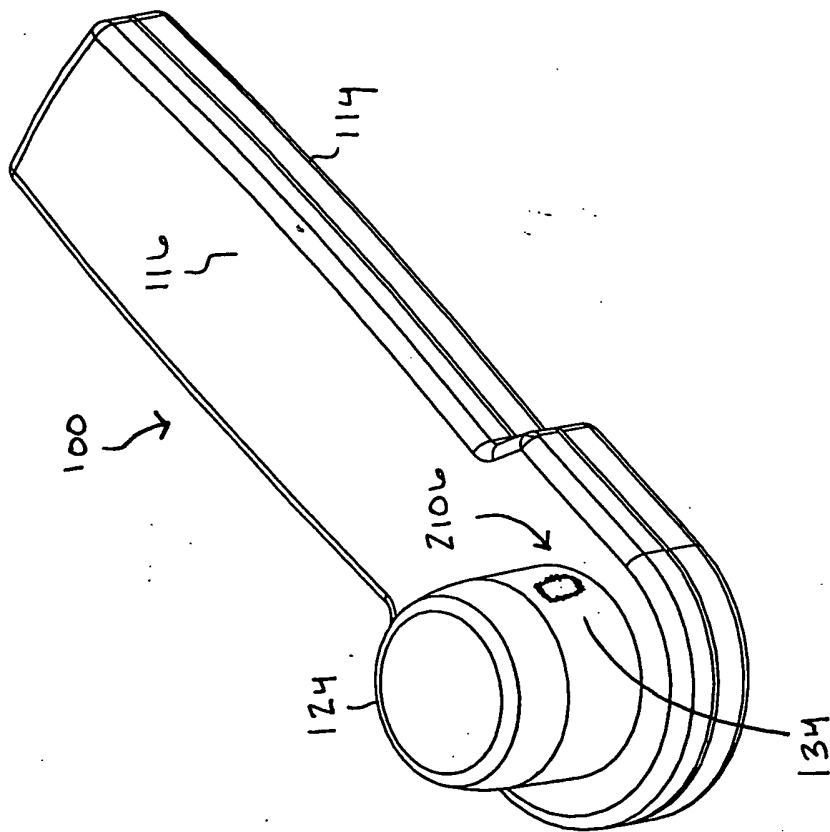


FIG. 23






25/36



26/36

FIG. 26

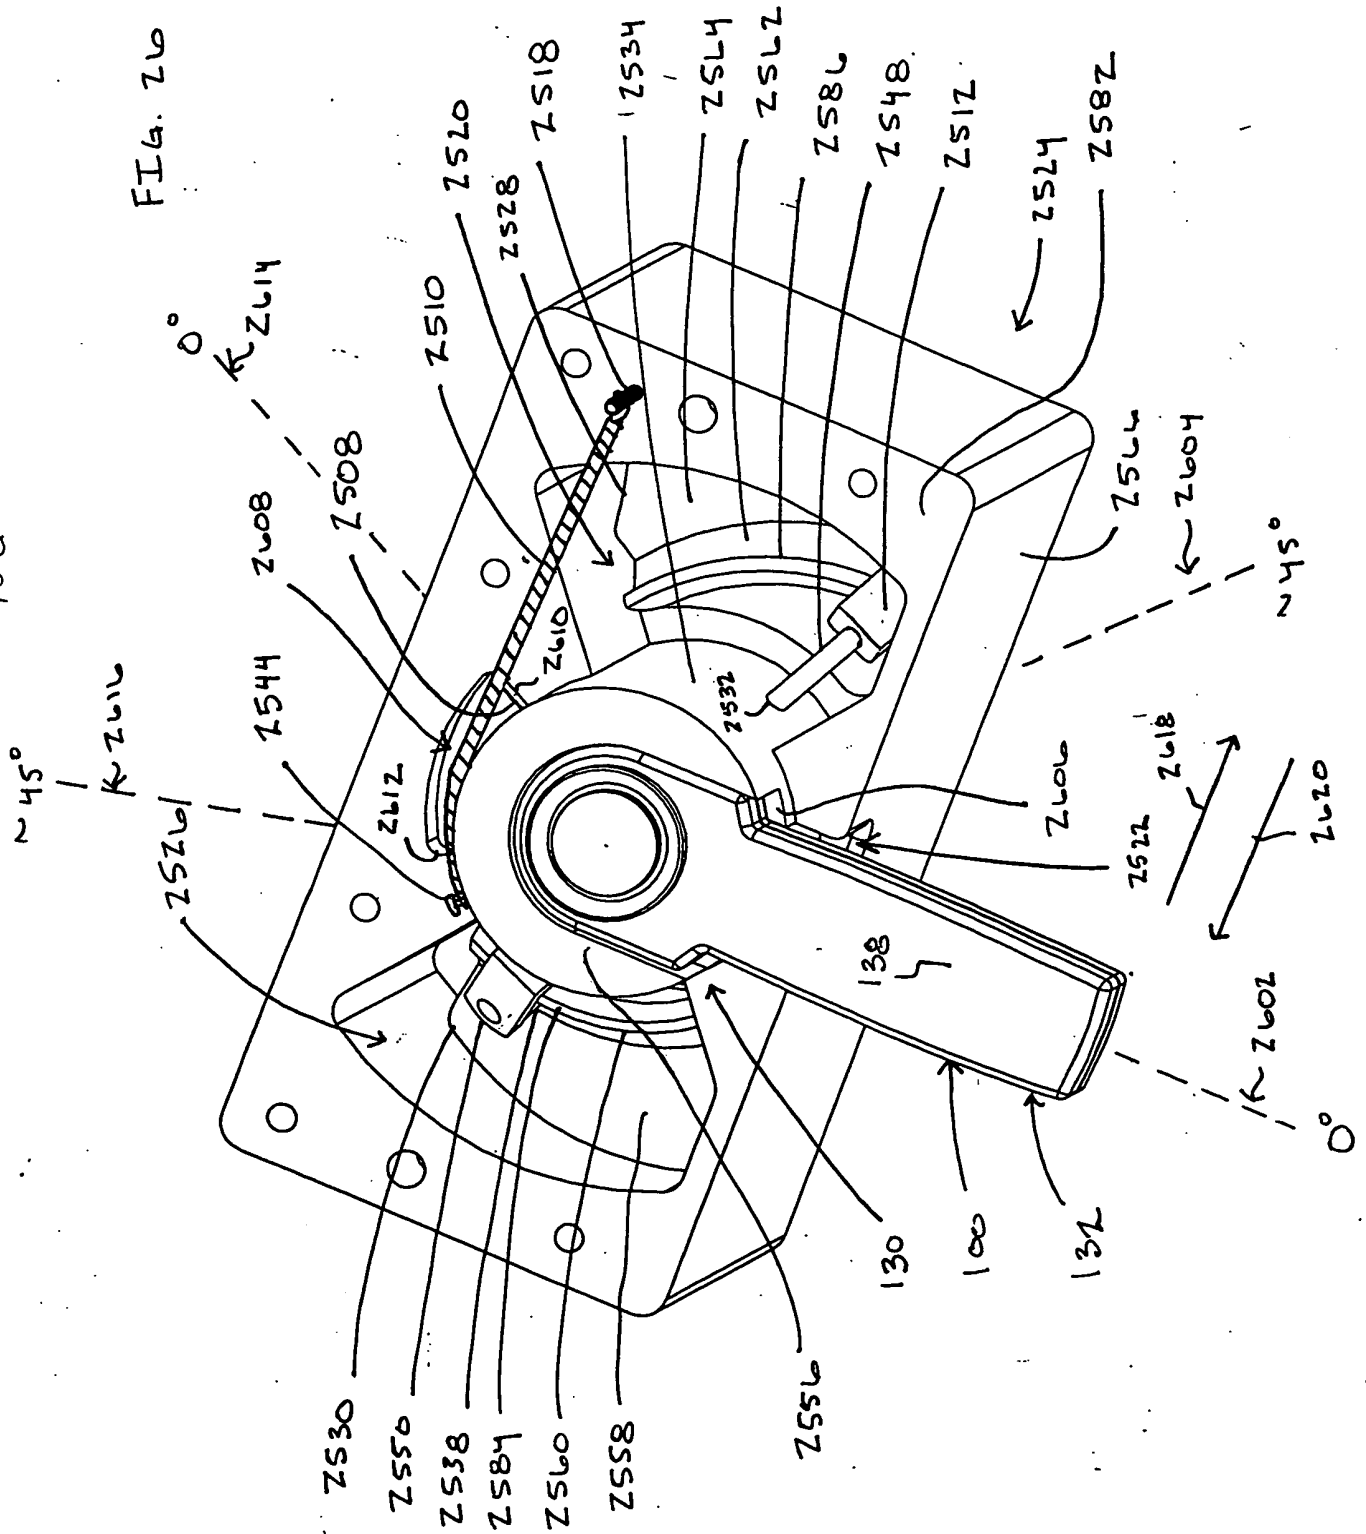

27/30

FIG. 27

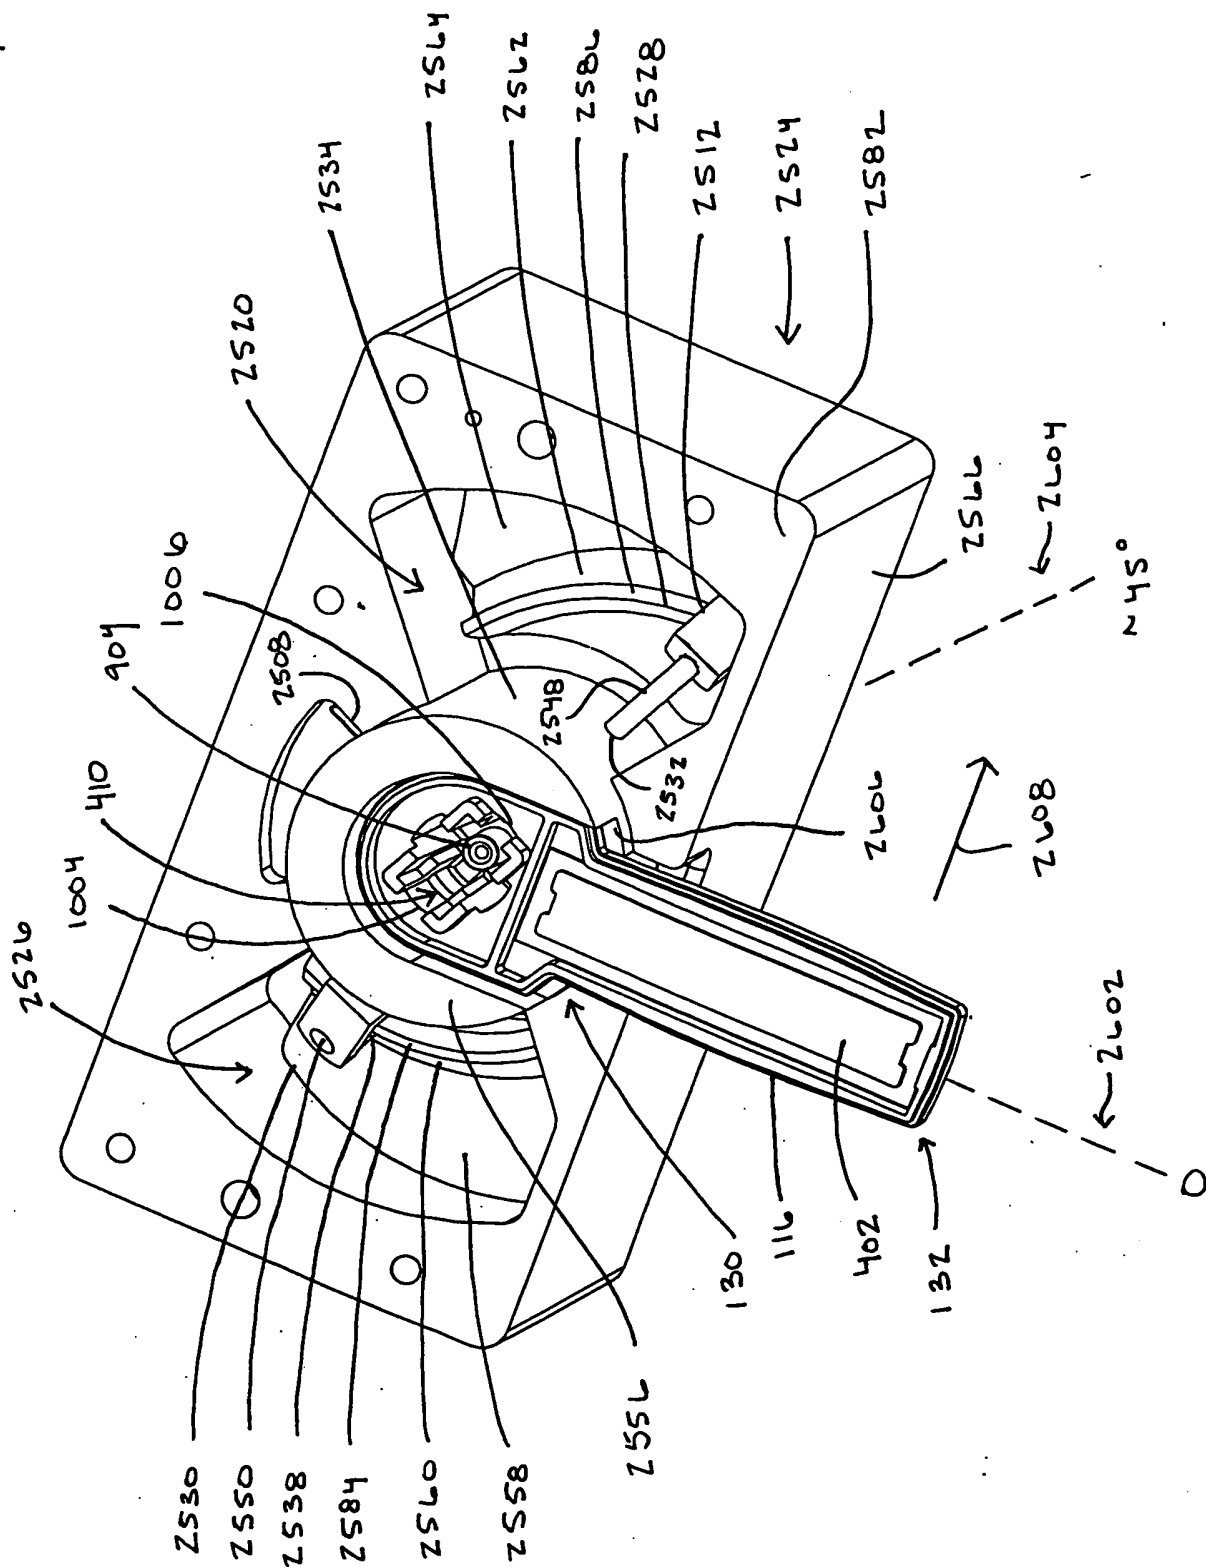
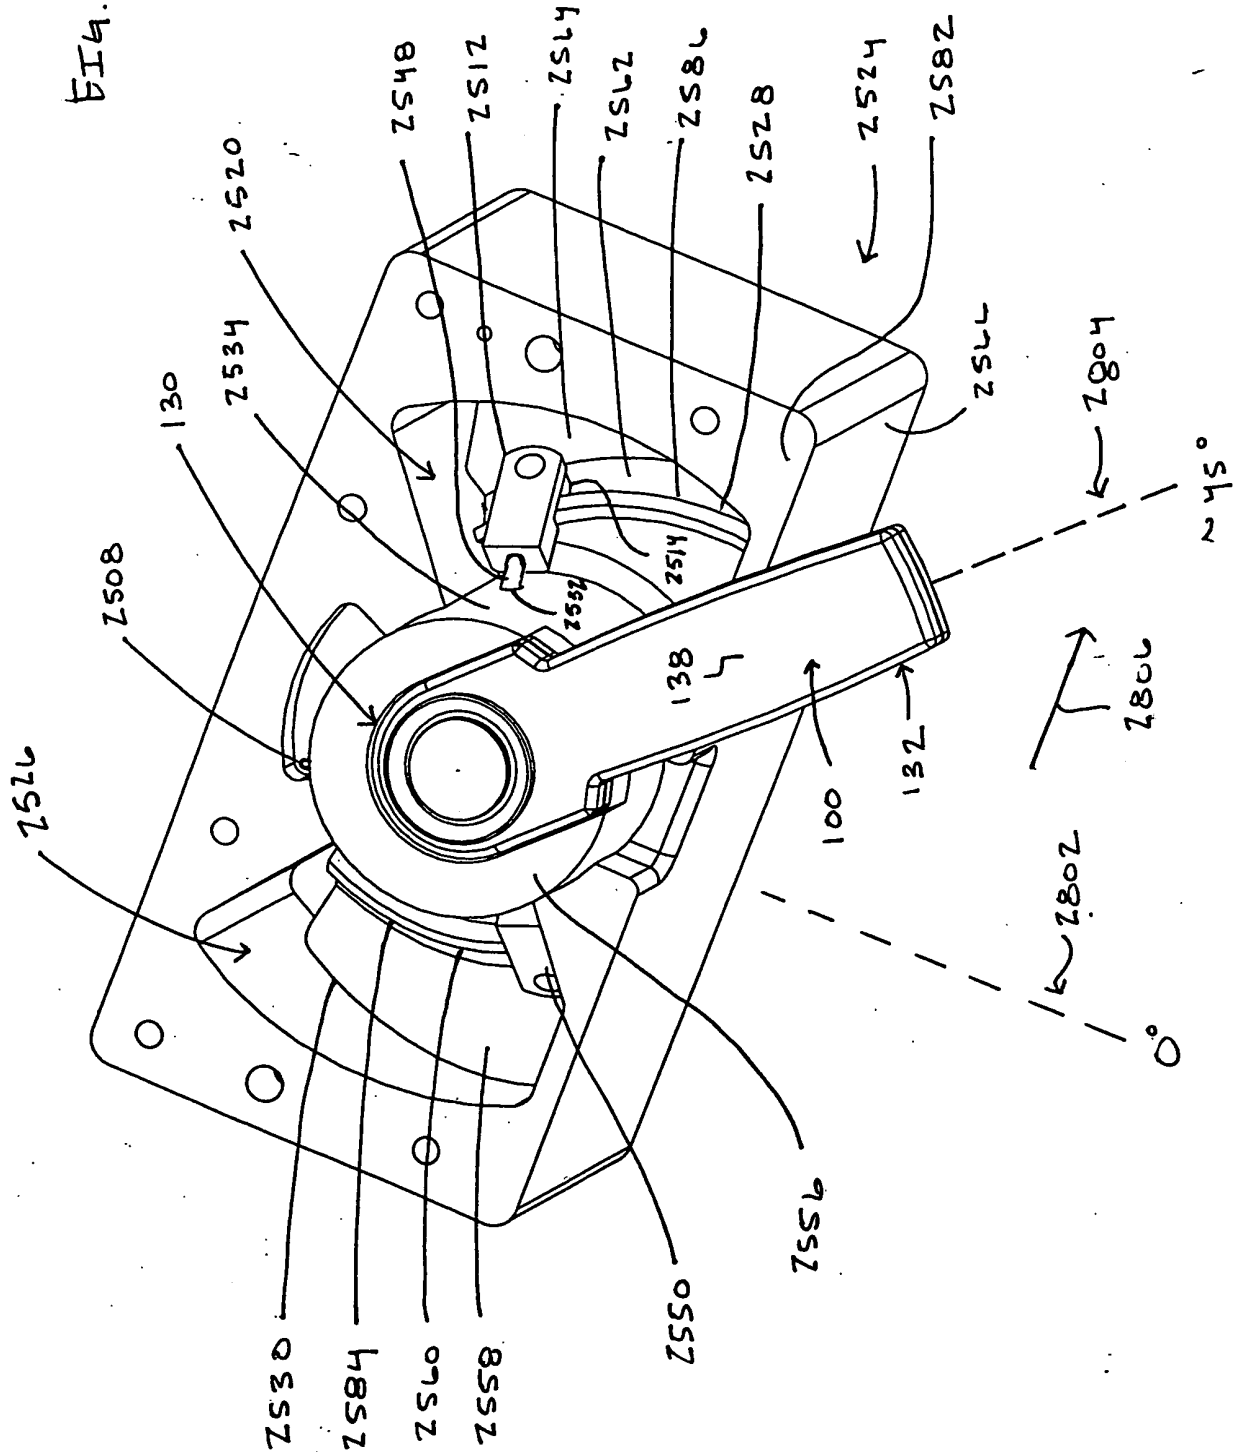


Fig. 28





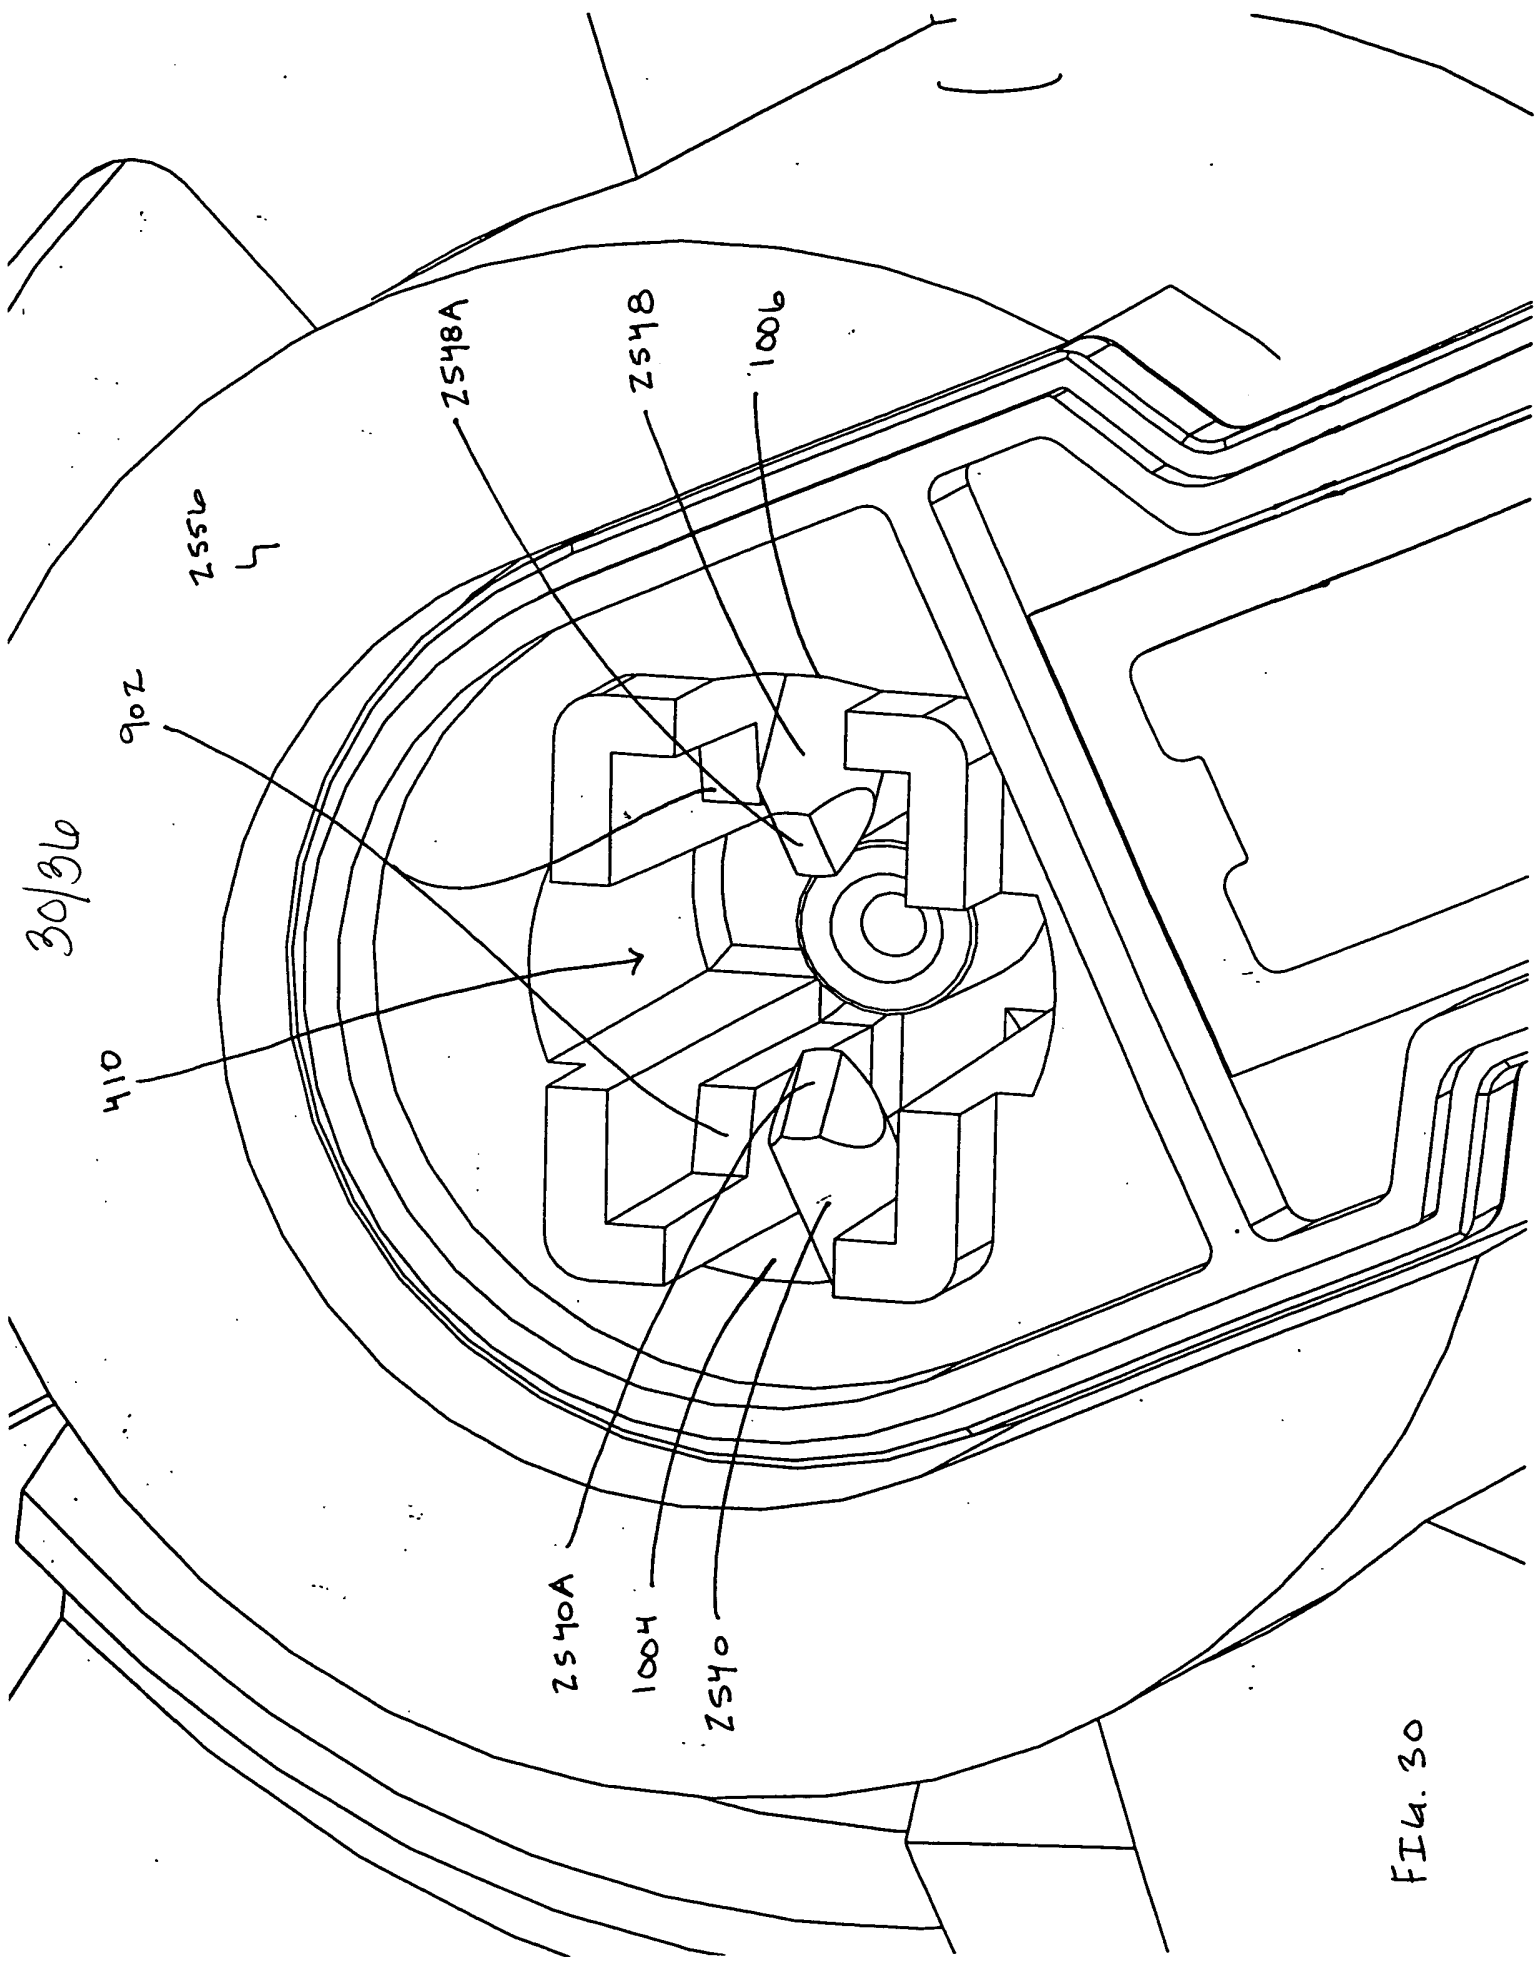


FIG. 30

31/36

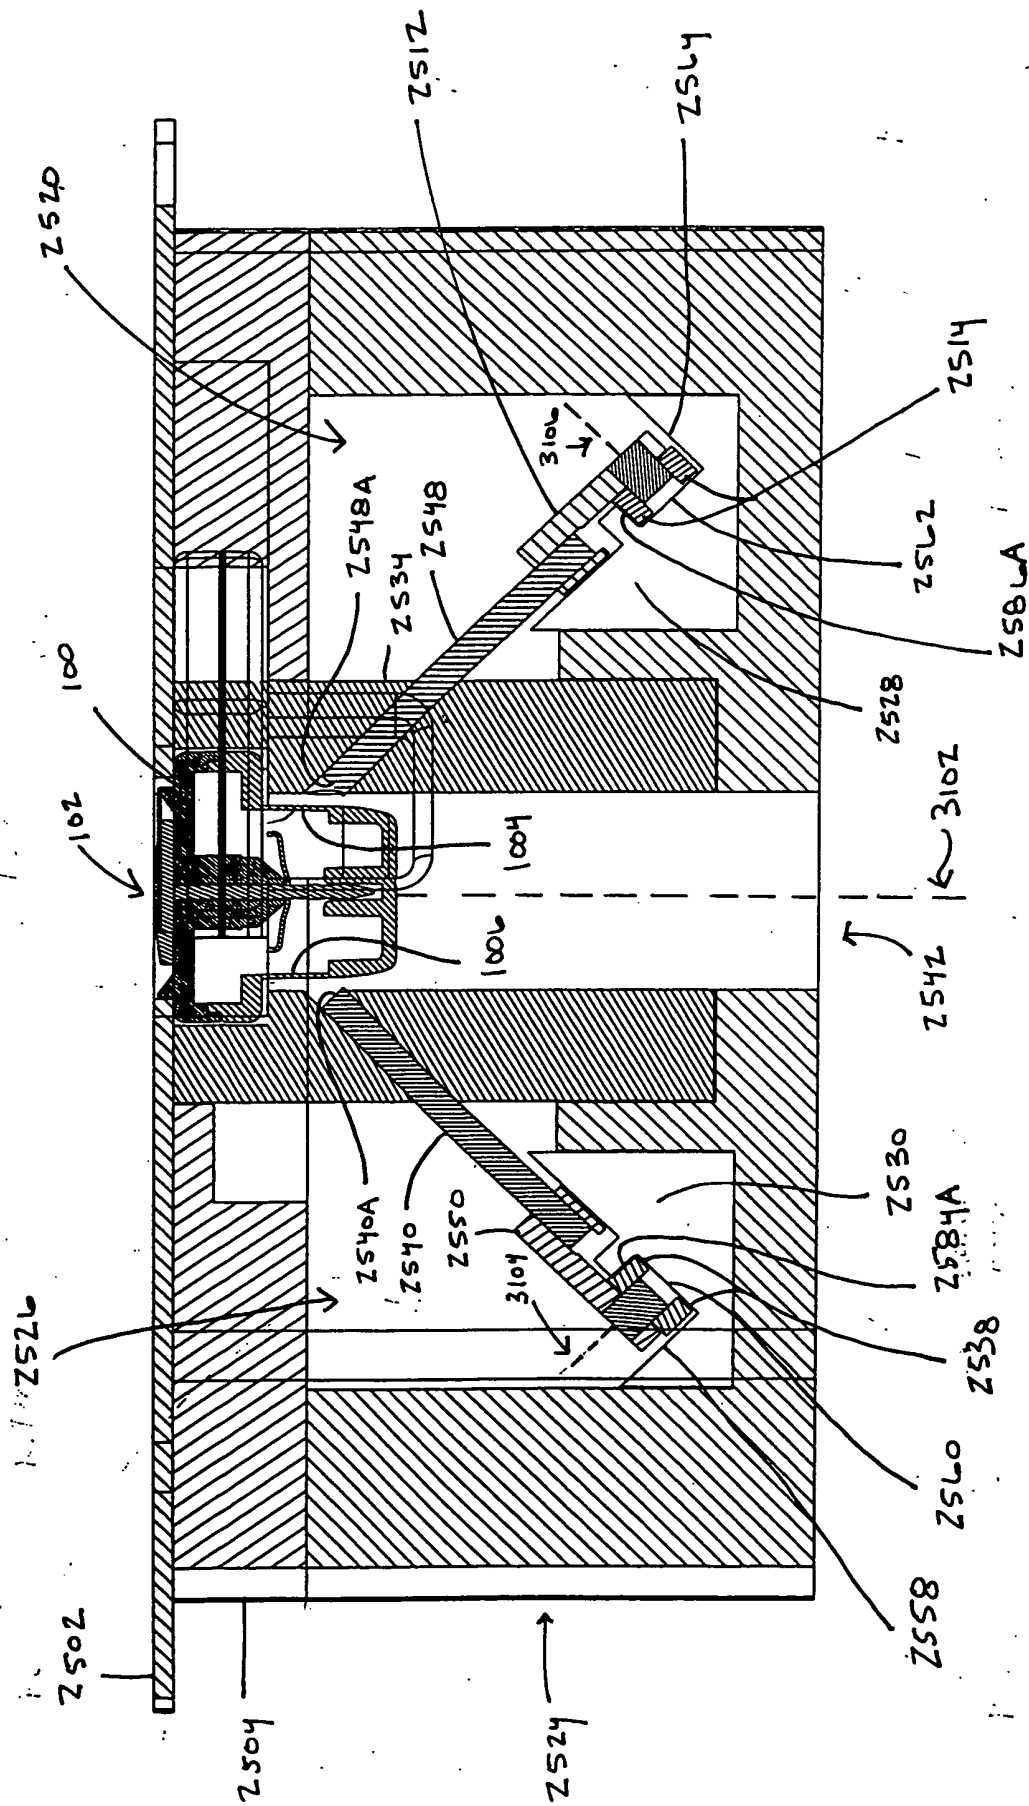


FIG. 31

32/36

3100

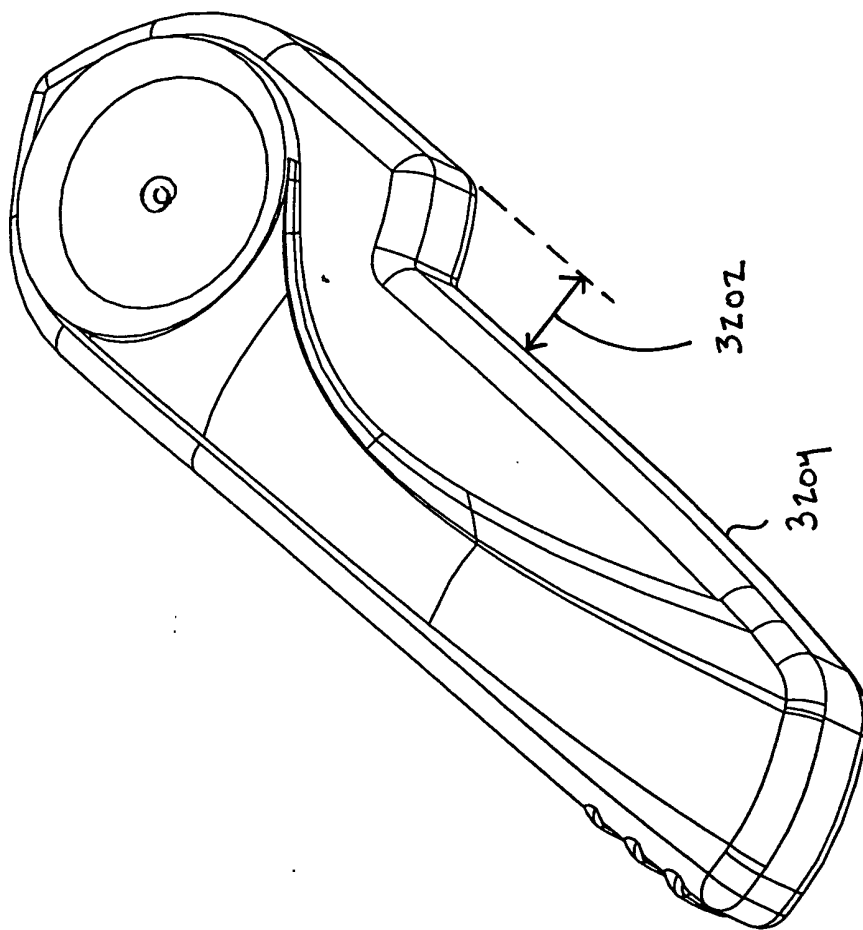


FIG. 32





34/36

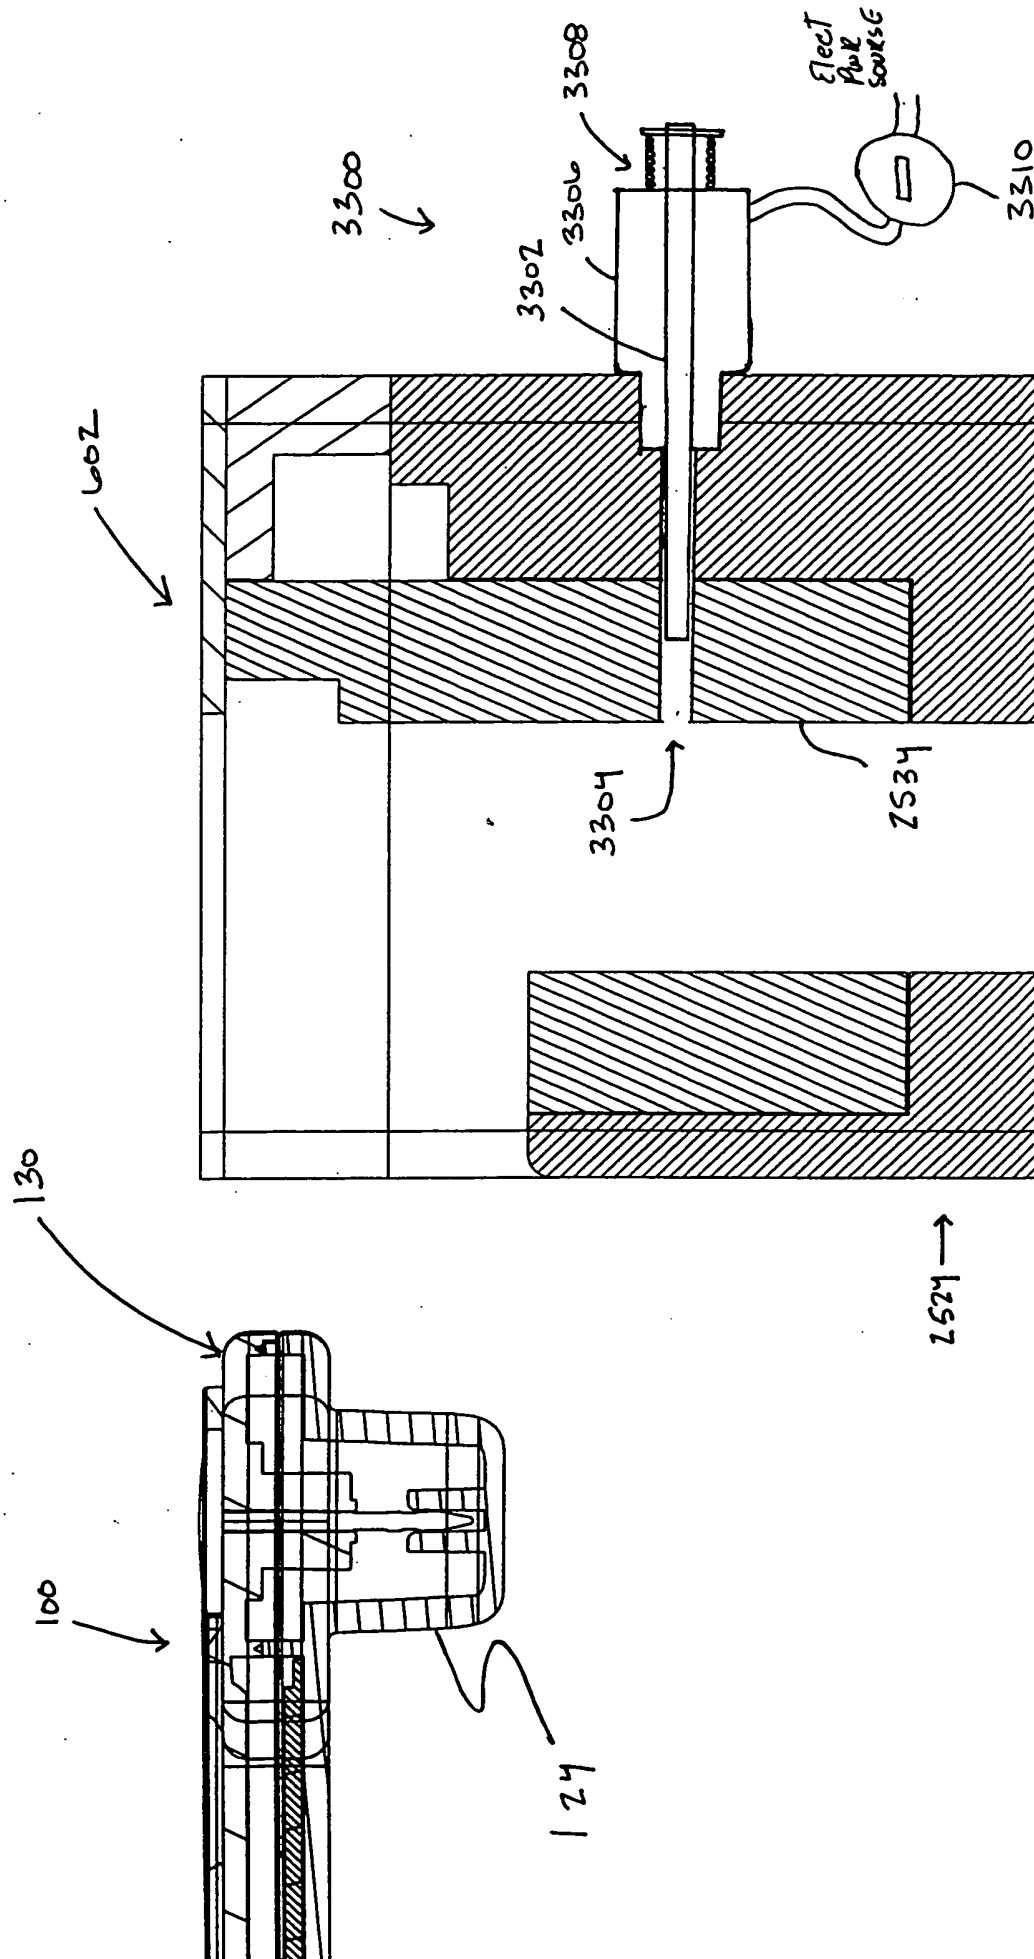


FIG. 34

35/36

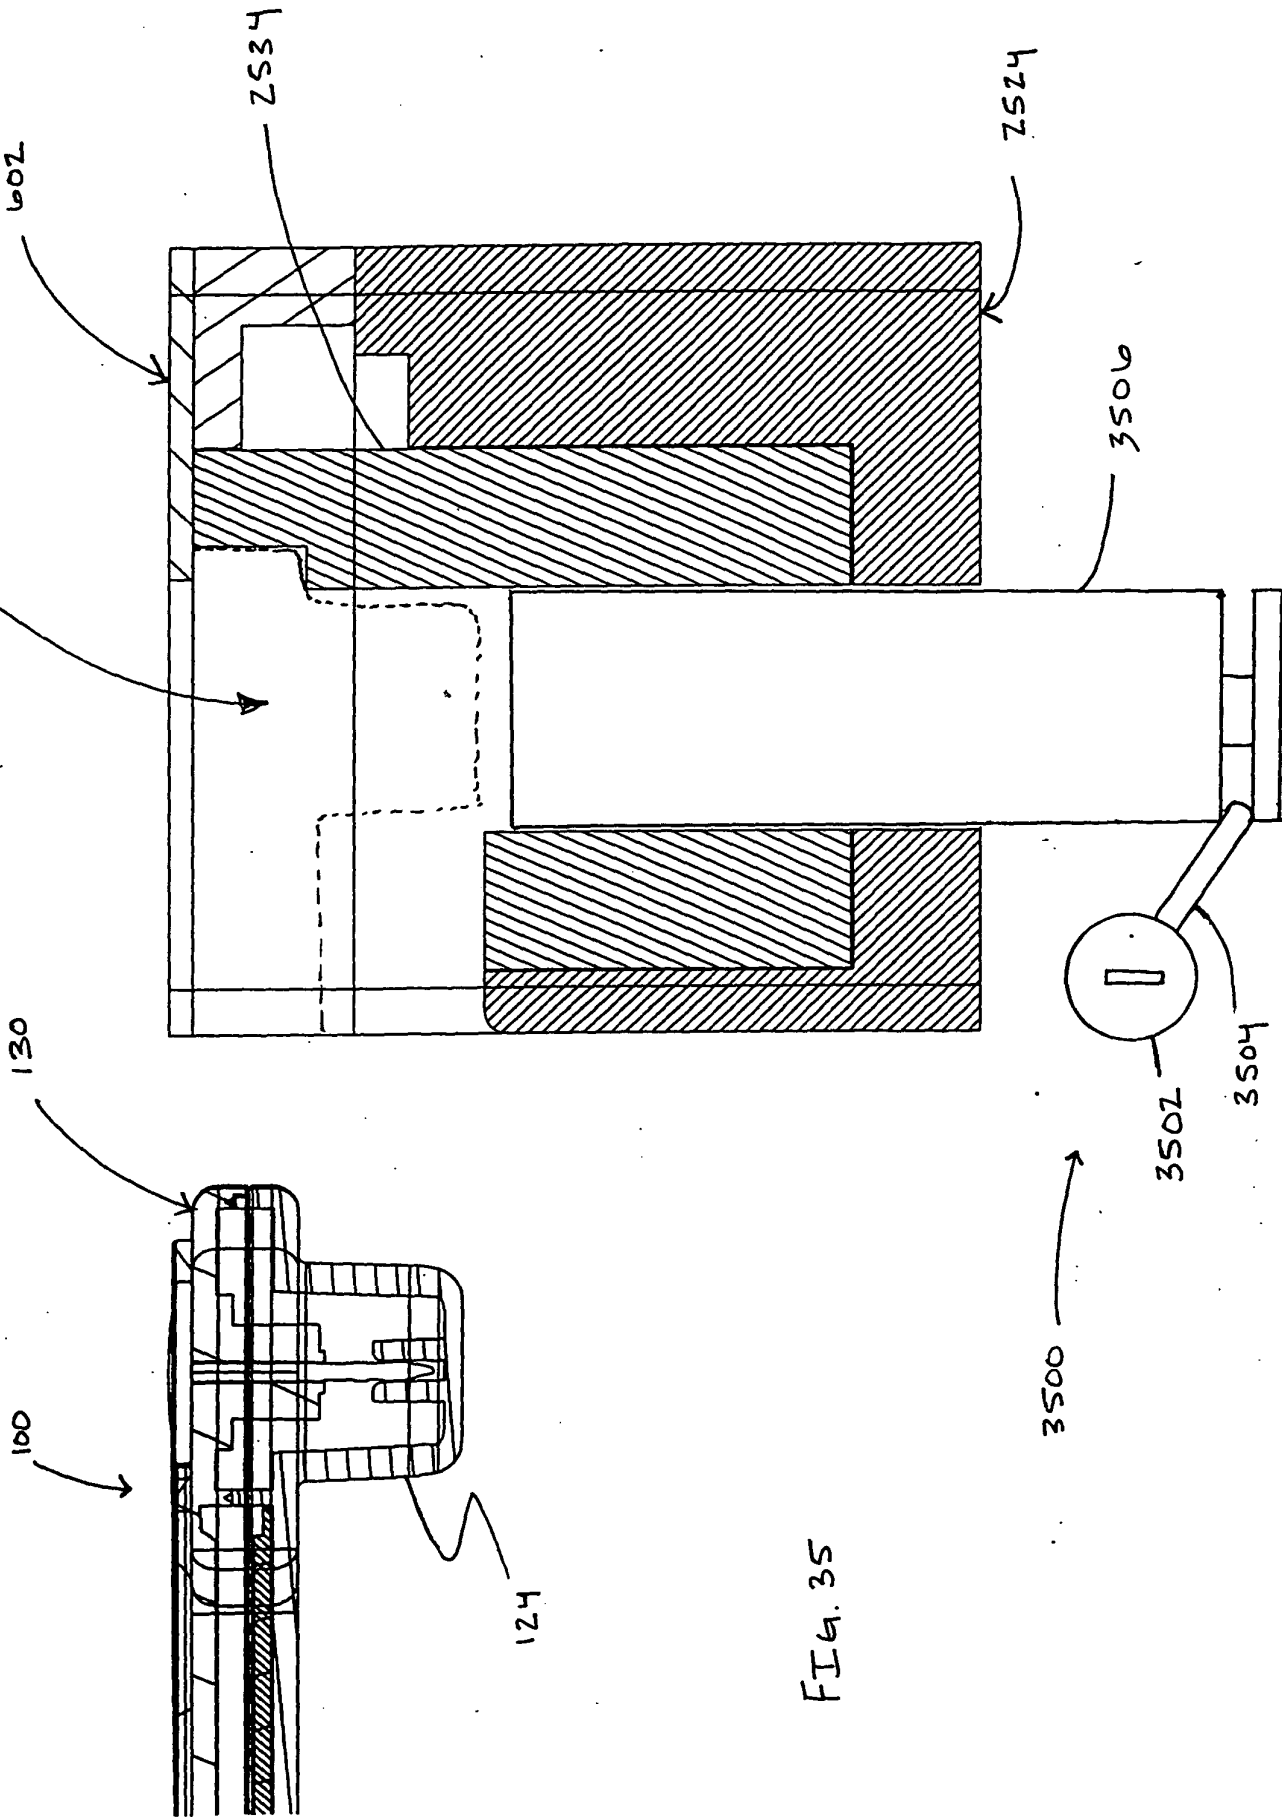


FIG. 35

36/30

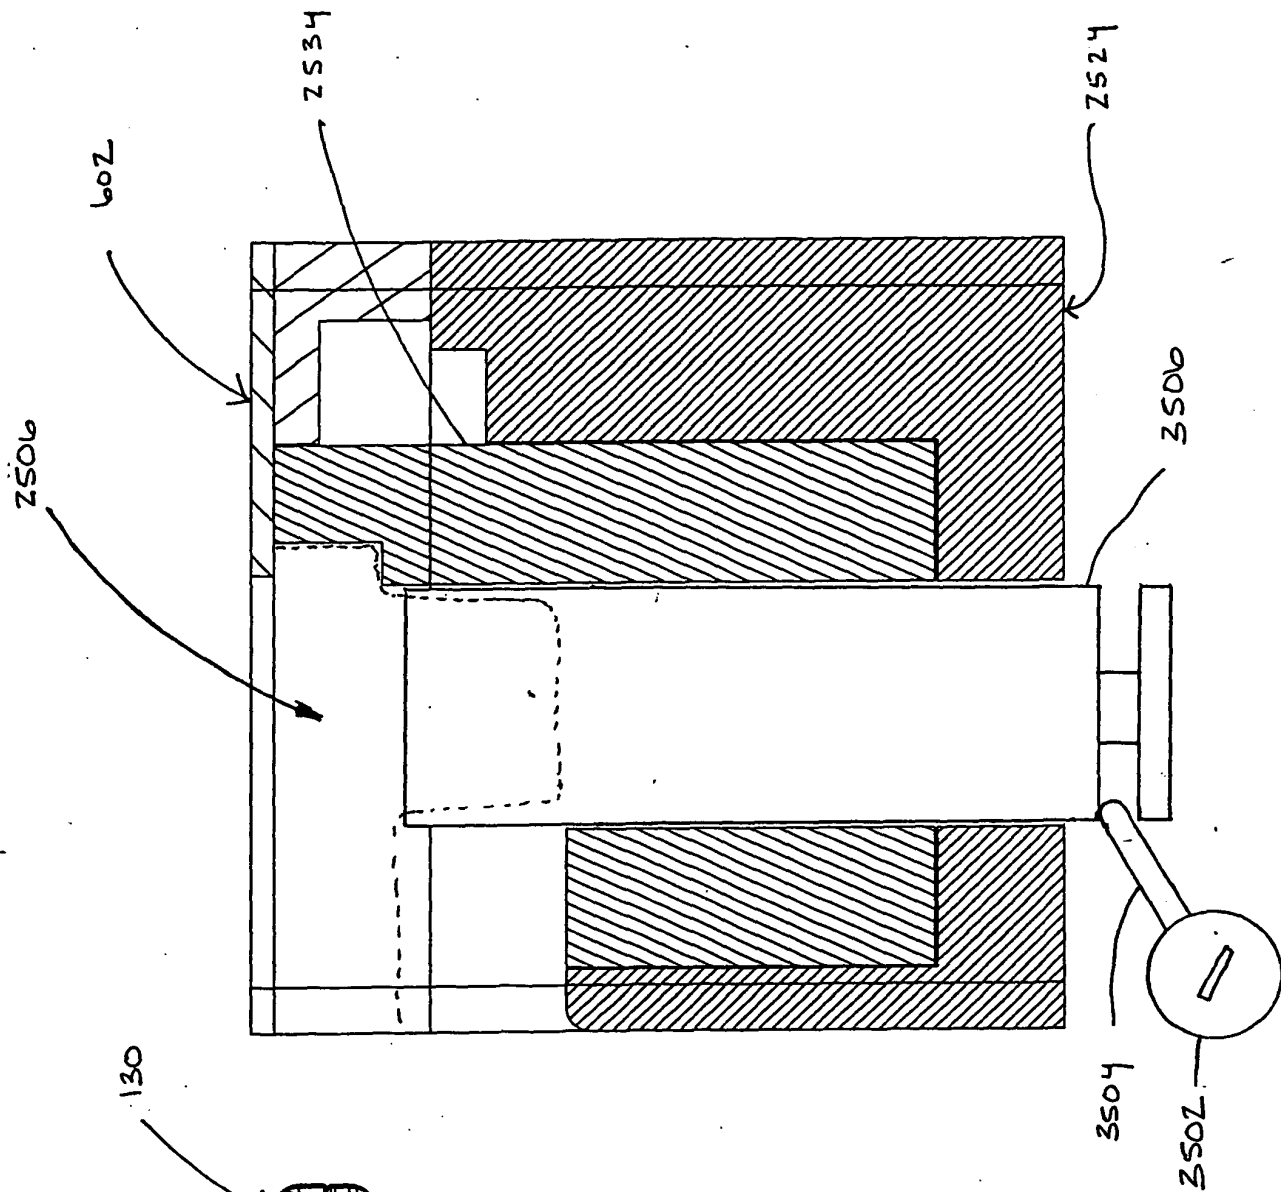
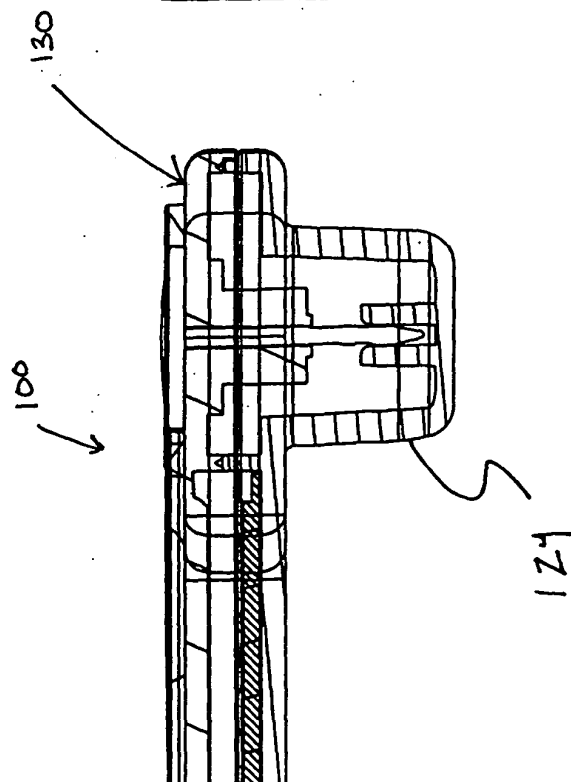


FIG. 36